

Air Cap and Fluid Tip Selection Guide



Finishing Brands.

A **CARLISLE** COMPANY

Issue E14.2 Oct 14


A. Introduction

Selecting the correct Air Cap and Fluid Tip combination for your spray gun application can be a confusing and uncertain time. Some of the DeVilbiss spray guns available have a vast range of options available. This guide is intended to show that this process is logical and far easier than you might think. There are a few simple rules to follow when choosing which set-up to use, the most important of which is...

'An Air Cap use is not limited to its original design application'

In other words, just because a certain Air Cap and Fluid Tip combination was designed for use, for example, with Waterbased coating materials in the Plastics market it does not mean to say that you might find it will work very well with your Solventbased wood application. The uses for a particular Air Cap and Fluid Tip combination are only limited by its users imagination.

The Air Caps covered in this book are for the following spray guns...

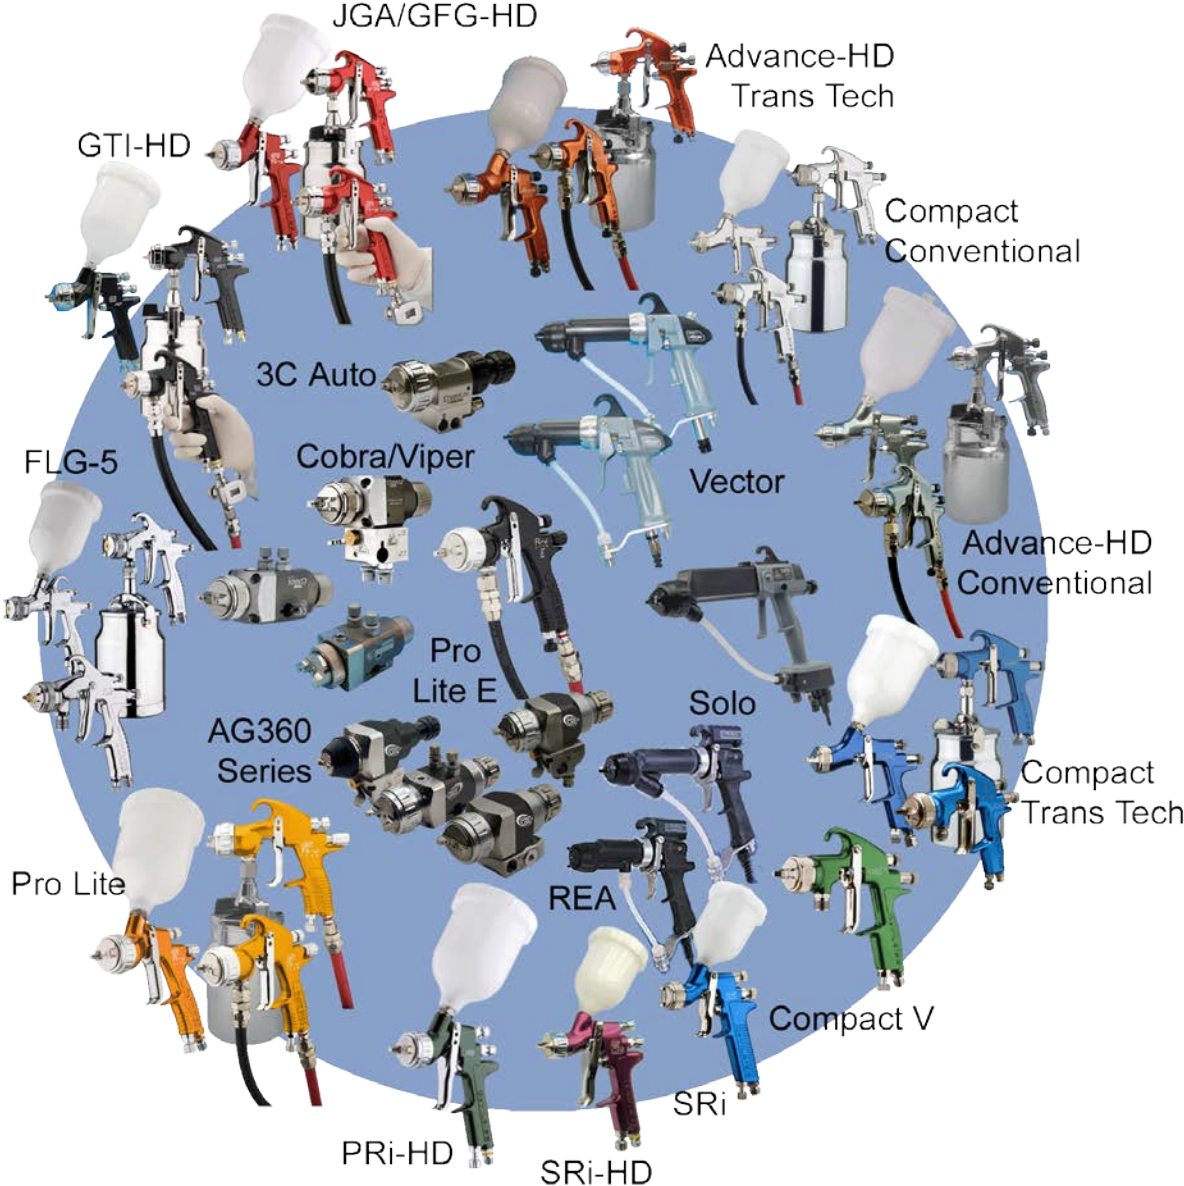

B. How an Air Cap Works

1. Air trapped between the outside edge of the Fluid Tip and the inside of the Air Cap retaining ring feeds air to the two holes on the back of the Air Cap that take air to the horn holes.



2. The amount of air going to the horn holes is controlled by the control valve on the top back of the gun.



3. Air from the ring of holes in the Fluid Tip feeds air to the Air Cap centre annulus and Air Cap face holes.



4. All of the air entering a hand gun is controlled by the rotary valve located on the base of the gun handle. This affects atomizing and fan air as it is opened and closed.



5. The spray pattern size and shape is a result of the influence of all of the air jets from the Air Cap and the quantity and speed of the fluid jet from the Fluid Tip. If the flow from any of these jets is uneven or distorted by dirt or damage to the holes then a bad pattern shape will be the result.

6. Air is forced out of the central annular air ring and is projected forward in a cylinder around the fluid jet (coming out of the Fluid Tip hole). The speed of the air shears and atomises the liquid into droplets which creates a cylindrical cloud moving towards the target.

7. The air jets exiting the 'Horn' holes squeeze the cylindrical cloud of droplets to form a spray 'fan' or 'pattern'. The more squeezing air, the longer the spray fan becomes.

8. Additional air from the 'face' holes in the Air Cap aid the stability of the spray pattern and help to keep the front of the Air Cap clean.

9. The size of the hole in the centre of the Fluid Tip directly controls the amount of fluid exiting a Suction or Gravity feed gun. On a Pressure feed spray gun the fluid Pressure is the primary control of fluid flow so the Fluid Tip hole becomes a secondary control.

10. The Fluid needle movement is controlled by the control knob on the back of the gun. This is the secondary fluid control method on a



Suction or Gravity gun and the tertiary method on a Pressure fed gun.

11. On the Cobra and Viper automatic spray guns the horn air is controlled by the FAN valve located on the top of the gun body.



12. The atomizing air is controlled by the second ATOM valve



13. The fluid needle control knob is located at the rear of the gun body. However, like a Pressure fed hand gun the main fluid control should be carried out by the fluid Pressure and the Fluid Tip diameter.



3. What is the difference?

Conventional, HVLP and Trans-Tech are all members of the Air Atomisation family, but each has slightly different operating parameters. Here is a very quick explanation of the differences.

Conventional Air Atomising

The most established method of air atomizing, used on spray guns for decades. It uses high velocity air jets to produce a very high atomization power. However this speed results in a low efficiency due to the considerable 'bounce-back' and 'spray-fog' caused. Air Pressure inside the Air Cap during use is typically 2 to 4 bar (30 to 60 psi) with an air volume consumption of 170 to 700 l/min (6 to 25 cfm).

High Volume Low Pressure (HVLP)

Although not a new, this method first became important in the early 1990's when Environmental Legislation started to be introduced. It uses larger air volumes (300 to 840 l/min or 11 to 30 cfm) at low Pressure to atomise the coating. It has a much higher Transfer Efficiency than Conventional Air Atomizing due to the lower Pressure air. However the droplet sizes produced tend to be slightly larger, sometimes resulting in a lower quality finish. Officially HVLP is limited by Government Environmental legislation to a maximum of 0.7 bar (10 psi) atomising Pressure.

Trans-Tech (Compliant)

This equipment type was first seen in the mid 1990's and is a mixture of Conventional and HVLP atomization methods. Trans-Tech makes more energy available for the atomization process but gives a higher Transfer Efficiency of coating material than the Conventional Air Atomizing method. Like HVLP, this 'complies' with Government legislation by being able to transfer at least 65% of the sprayed material to the sprayed component (BSEN 13966 'Determination of Transfer Efficiency of atomising and spraying equipment for liquid coating materials'). Air Cap Pressure is typically in the region of 1.3 to 3 bar (20 to 45 psi) while using 250 to 560 l/min (9 to 20 cfm) to carry out its work. HVLP has been replaced by Trans-Tech (Compliant) Atomisation in most applications due to its better performance.

D. Air Cap and Fluid Tip Selection

You must answer the following 7 questions during your selection process. There is no beginning or end question as which one is the most important will vary from process to process. However all 7 questions must be answered before you can proceed successfully.

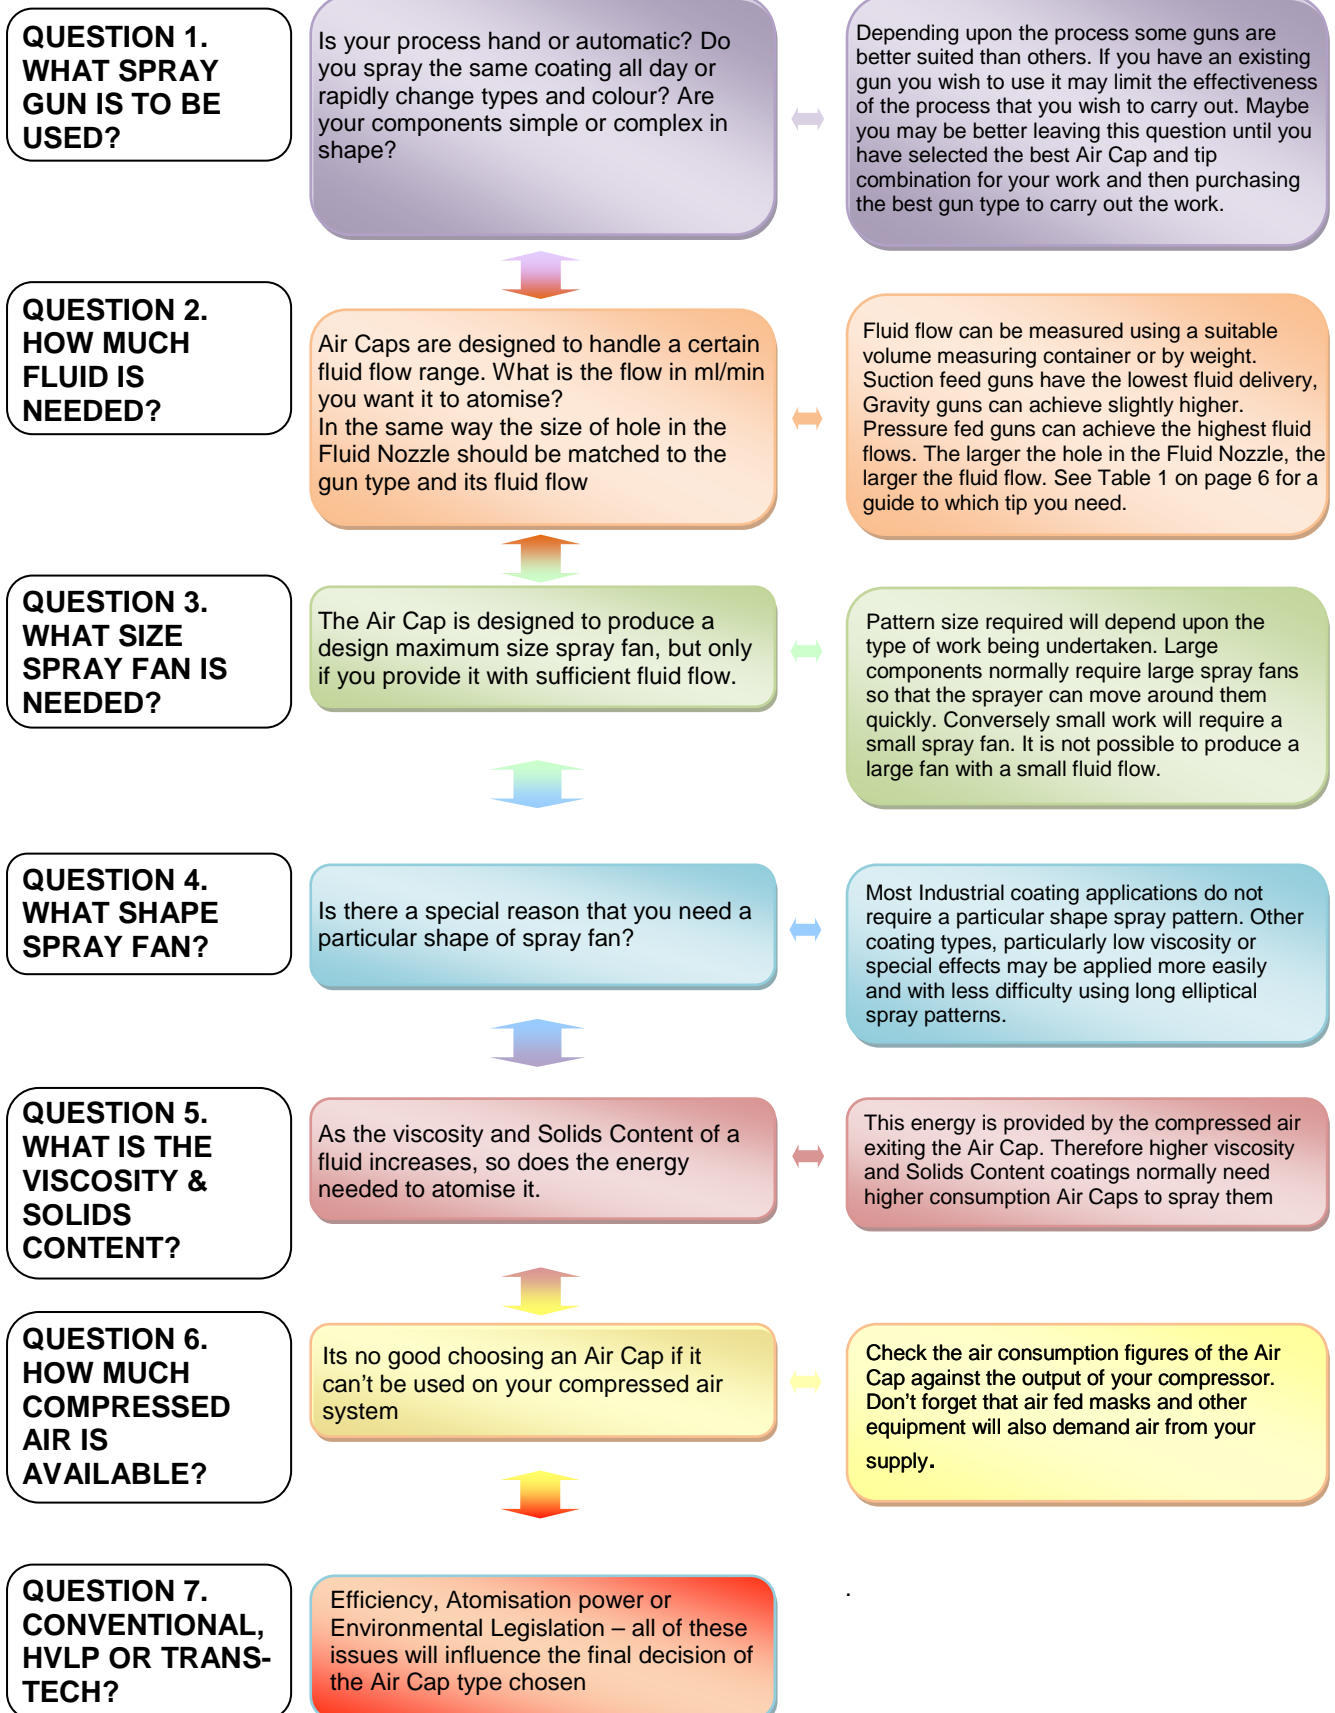
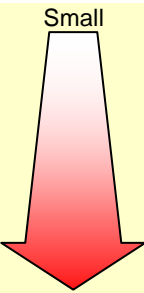


Table 1. Theoretical Fluid Tip diameter recommendations

Application Size	Typical Applications	Fluid Flow ml/min	Suction Gun Hole dia mm	Gravity Gun Hole dia mm	Pressure Gun Hole dia mm
	Adhesive	10 to 100	0.85 to 1.2	0.7 to 1.0	0.5 to 0.7
	Mobile Telephones	50 to 150	1.0 to 1.4	0.85 to 1.2	0.7 to 1.0
	Cosmetics Containers	100 to 200	1.2 to 1.6	1.0 to 1.4	0.85 to 1.2
	General Industrial Finishing	150 to 250	1.4 to 1.8	1.2 to 1.6	1.0 to 1.4
	Wooden Furniture	200 to 300	1.6 to 2.0	1.4 to 1.8	1.2 to 1.4
	Aerospace, Tableware Ceramic	250 to 350	1.8 to 2.2	1.6 to 2.0	1.2 to 1.6
	Rolling Stock,	300 to 400	Not possible	1.8 to 2.2	1.4 to 1.6
	Leather Finishing	350 to 500	Not possible	Not possible	1.4 to 1.6
	Protective Wax	400 to 600	Not possible	Not possible	1.4 to 1.8
	Lubrication Oil	600 to 800	Not possible	Not possible	1.6 to 1.8
	Sanitaryware Ceramic	700 to 1000	Not possible	Not possible	1.8 to 2.0

The above chart is based solely upon the theoretical Fluid Tip diameter needed for an average coating fluid type 15 to 25 seconds Din 4 viscosity. In the real world the selection must also take into account the viscosity of the material. As the viscosity of the coating increases the Fluid Tip required will generally increase as well. Likewise, as the viscosity decreases, the Fluid Tip diameter needed for a given fluid flow will decrease as well. Not all Fluid Tip hole sizes will be available for all gun types.

Table 2. Pattern Shape

Type	Long Ellipse	Short Ellipse	Straight Side/Round End	Straight Side/Taper End	Round
Good For	Non-perpendicular spraying. Metallic content & special effect. Low Viscosity. Low coating thickness Multiple overlapping Auto guns.	Solid Colour Primers	Perpendicular spraying Solid Colours & some metallic. Soft Touch coatings & some Waterbase. Sprayed area sharp cut-off.	Large Spray fan Non-perpendicular spraying. Metallic content	Precise application
Bad For	Soft Touch coatings & some Waterbase. Sprayed area sharp cut-off.	Metallic & special effect. Large surfaces. Low Viscosity. Low film weight.	Angled Surface Spraying	Sprayed area sharp cut-off.	Large area spraying

Remember: FAN and ATOM air Pressures, fluid flow and fluid viscosity can alter the spray fan shape from its original design specification and its appearance/dimensions shown in the photographs

E. How to use these Data sheets

Air Cap Part Number

Air Cap type and atomization method

On which spray guns this Air Cap is used

Fluid Tips and needles available for use with this Air Cap

How much compressed air is used at a certain gun dynamic Inlet Pressure

Pattern size and shape

Typical market sectors where the Air Cap is used.

Fluid handling capabilities

The original design specification of the Air Cap.

What material is the Air Cap and made from?

Part numbers for the Air Cap

Notes about upgrades and design changes

510+

Used on Gun Advance-HD Suction, Gravity & Pressure Hand Guns
Compact Suction, Gravity & Pressure Hand Guns
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun

Fluid Nozzle Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
0.85mm				
1.0mm				
1.2mm				
1.3mm				
1.4mm				
1.6mm				
1.8mm				
2.0mm				
2.2mm				

MAKE REFERENCE TO CHART ON PAGE 28

Air Consumption Graph
(Measured using Cobra 1 with 1.6mm Fluid nozzle)

Spray Pattern

Pattern Shape: Long Ellipse

Design Target Distance: 200mm (8")

Approximate Fan Size: 270mm long x 60mm wide @ 290 ml/min 20 sec Ford 4

Typical Applications: Wood, Metal, Ceramic, Adhesive, Plastic, Aerospace, Military, Decorative, Construction, Light Marine, Release Agent

Original design Specification: Solventbased coatings. Long Elliptical pattern, Small to medium production 2bar dynamic inlet Pressure

Materials of Construction: Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-510-K (Cap & Retaining Ring)

Notes: The original #10 air cap was modified and re-launched in March 2008 as the 510+ for manufacturing and production changes. No changes in atomization or general performance will be experienced between the two air caps. All part numbers and references remain the same as the original #10.

Table 3A. Air Caps included in this Guide Pt A

Air Cap #	FLG5	Ransburg REA	Ransburg Vector	Ransburg Solo	SRI	Compact	Advance	JGA-HD	GFG-HD	Scorpion	Viper	GTI-HD	SRI-HD	PRI-HD	Cobra 1	Cobra 2	Cobra 3C	Pro Lite-P	Pro Lite-G	Pro Lite-S	AG361	AG362	AG361E & PRO Lite E	Conventional	HVLP	Trans-Tech	Fluid Feed method	Pattern Size mm @ 200mm Target	Max Fluid m/min	Page #	
5																											SGP	280	250	10	
65R																												P	300	600	11
65V																												P	300	600	12
98V																												P	320	600	13
200																											G	50 ¹	150	14	
205																											G	150 ²	150	15	
210																											G	150 ²	150	16	
430																												SGP	200	300	17
443																												SGP	300	300	18
462																												P	450 ⁵	3000	19
470																												P	250 ³	2000	20
477																												P	430	800	21
480																												P	260	250	22
497																												P	350 ³	800	23
500R																												SGP	15 ²	150	24
505																												SGP	270	250	25
510																												SGP	270	250	26
513																												P	230	800	27
515																												P	320	800	28
520																												SGP	280	250	29
522																												P	230	800	30
523																												P	310	400	31
590																												P	150 ⁴	150	32
590HV																												P	150 ²	150	33
591+																												P	200 ⁴	150	34

Notes: ¹ at 10" (20 cm) target distance,
² at 6" (15 cm) target distance,
³ at 12" (30 cm) target distance,
⁴ at 4" (10 cm) target distance
⁵ at 18" (45 cm) target distance

Table 3B. Air Caps included in this Guide Pt B

Air Cap #	FLG5	Ransburg REA	Ransburg Vector	Ransburg Solo	SRI	Compact	Advance	JGA+HD	GFG+HD	Scorpion	Viper	GTI+HD	SRI+HD	PRI+HD	Cobra 1	Cobra 2	Cobra 3C	Pro Lite-P	Pro Lite-G	Pro Lite-S	AG361	AG362	AG361E & PRO Lite E	Conventional	HVLP	Trans-Tech	Fluid Feed method	Pattern Size mm @ 200mm Target	Max Fluid ml/min	Page #
622	■																										P	265	300	36
C1							■	■														■	■	■			SGP	270	250	37
C2							■	■														■	■	■			SGP	250	350	38
C3							■															■	■	■			P	360	600	39
C62																							■				P	520 ³	3500	40
C64																							■				P	450 ³	2500	41
C67																							■				P	500 ³	1500	42
E22									■	■															■		P	410 ³	300	43
E31											■	■														■	P	400 ³	300	44
E63												■	■												■		P	360 ³	900	45
E70												■	■												■		P	600 ³	1800	46
H1												■													■		SGP	315	200	47
HS1													■												■		G	210	190	48
HV30																		■	■	■	■	■	■		■		SGP	315	200	49
P1															■											■	G	270	350	50
R40																		■				■	■			■	P	70	250	51
RS1																									■		G	30 ⁴	100	52
T1													■	■												■	SGP	300	200	53
T2													■	■												■	SGP	290	200	54
T3																										■	P	300	300	55
T4													■													■	P	380 ¹	400	56
TE10																		■	■	■	■	■	■			■	SGP	300	200	57
TE20																		■	■	■	■	■	■			■	SGP	290	200	58
TE30																		■				■	■	■		■	P	300	300	59
TE40																		■				■	■	■		■	P	380	400	60
TE50																		■				■	■	■		■	P	200	400	61
TS1													■													■	G	205	200	63

Notes: ¹ at 10" (20cm) target Distance,
² at 6" (15cm) target distance,
³ at 12" (30cm) target distance,
⁴ at 4" (10cm) target Distance

5

TRANS-TECH

TRANS-TECH



#5 Air Cap:


Type:
Trans-Tech Compliant
External Mix

Used on Gun Type: FLG-5 Suction, Pressure and Gravity Feed Spray Guns

Used over Fluid Tips:	Hole Size:	Gravity Fluid Needle	Suction Fluid Needle	Pressure Fluid Needle
SGK-0012-14	1.4mm	SGK-0414	Not Available	SGK-0402-14
SGK-0014-18	1.8mm	SGK-0418	SGK-0430-18	Not Available
SGK-0012-20	2.0mm	SGK-0420	Not Available	Not Available

Air Consumption Graph

(measured using FLG-G gun with 1.6mm fluid Tip)

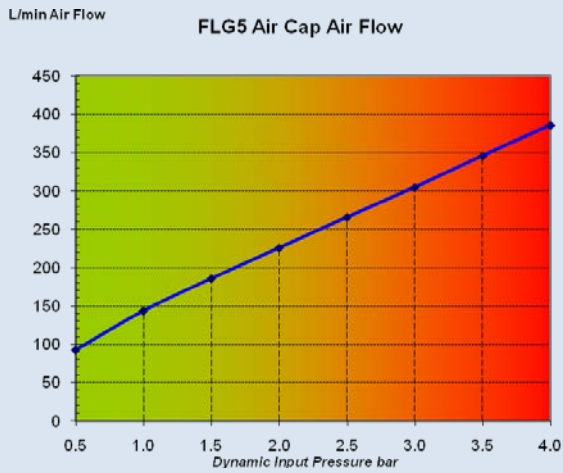

Spray Pattern



Pattern Shape:
Short Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
280mm long x 70mm wide
@ 170 ml/min using 25 sec
Din4 @ 200mm (8") Target
Distance

Typical Applications:

Wood, General Industrial, Lubricants, Adhesive, Decorative, Release Agent

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
50-250 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Material Supply:

Suction, Gravity & Pressure Feed

Original design specification:

General Purpose Application Air Cap

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Numbers: FLG-0001-5 Air Cap (only)

Notes:

FLG-5 Guns fitted with #5 Air Cap require different internal Air Baffle to guns fitted with #622 Air Cap

65R

CONVENTIONAL



#65R Air Cap:

Type:
Conventional
External Mix


Used on Gun Type: Ransburg REA Electrostatic Hand Guns

Used over Fluid Tips:	Hole Size:	Tip Material	Fluid Needle Electrode End	Electrode Material
4907-44	1.4mm	Acetal	70430-00	Acetal
4907-45	1.8mm	Acetal	70430-00	Acetal
4907-46	1.0mm	Acetal	70430-00	Acetal
4907-47	0.7mm	Acetal	70430-00	Acetal
4907-48	1.2mm	Acetal	70430-00	Acetal

CONVENTIONAL

Air Consumption Graph

(measured using REA90 gun with 1.8mm Fluid Tip)

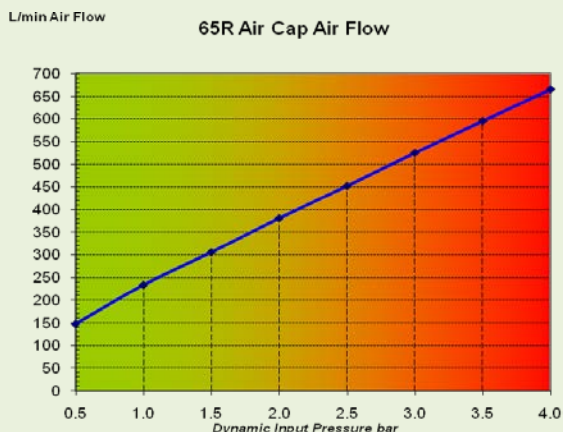

Spray Pattern



Pattern Shape:
Long Ellipse

Design Target Distance:
305mm (12")

Approximate Fan Size:

300mm long x 70mm wide @
280 ml/min using 25 sec Din 4
@ 200mm (8") Target
Distance

400mm long x 100 wide @
280 ml/min using 25 sec Din 4
@ 305mm (12") Target
Distance

Typical Applications:

Wood, General Industrial, Metal, Lubricants, NDT
Crack Detection, Plastic, Aerospace, Military,
Decorative, Construction, Light Marine, Release
Agent

Typical Fluid Flow Specification:

Medium to Large scale application Air Cap.

200-600 ml/min

Viscosity Range Sprayed:

12 to 40 Din 4

Fluid Supply: Pressure Feed

Original design specification:

General purpose medium to high production applications
3.0-4.0 Bar Dynamic Air Inlet Pressure

Materials of Construction

Machined Acetal

Part Number: 4904-65R Air Cap (only).

Notes:

65V

CONVENTIONAL



#65V Air Cap:

Type:
Conventional
External Mix


Used on Gun Type: Ransburg Vector and Solo Electrostatic Hand Guns

Used over Fluid Tips:	Hole Size:	Tip Material	Fluid Needle Electrode End	Electrode Material
79377-44	1.4mm	Standard Wear Acetal	70430-01	Acetal
79377-144	1.4mm	Extended Wear PEEK	70430-01	Acetal
79377-45	1.8mm	Standard Wear Acetal	70430-01	Acetal
79377-145	1.8mm	Extended Wear PEEK	70430-01	Acetal
79377-46	1.0mm	Standard Wear Acetal	70430-01	Acetal
79377-146	1.0mm	Extended Wear PEEK	70430-01	Acetal
79377-47	0.7mm	Standard Wear Acetal	70430-01	Acetal
79377-147	0.7mm	Extended Wear PEEK	70430-01	Acetal
79377-48	1.2mm	Standard Wear Acetal	70430-01	Acetal


CONVENTIONAL

Air Consumption Graph

(measured using R90 gun with 1.4mm Fluid Tip)

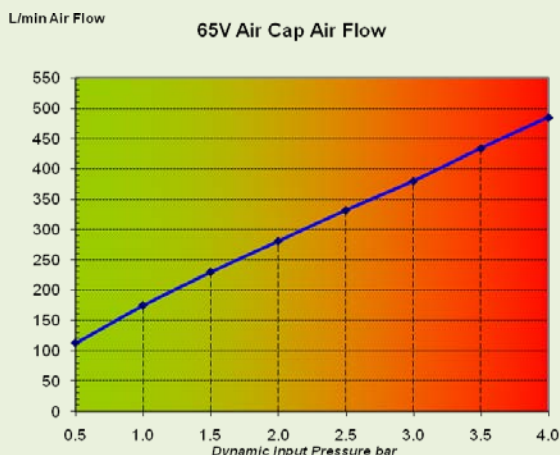

Spray Pattern

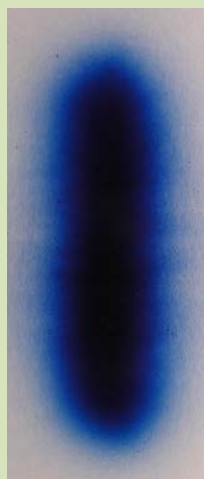

Pattern Shape:

Straight Side/Round End

Design Target Distance:
305mm (12")

Approximate Fan Size:

300mm long x 60mm wide @
300 ml/min using 25 sec Din4
@ 200mm (8") Target
Distance

Typical Applications:

Wood, General Industrial, Metal, Lubricants, NDT
Crack Detection, Plastic, Aerospace, Military,
Decorative, Construction, Light Marine, Release
Agent

Typical Fluid Flow Specification:

Medium to Large scale application Air Cap.
200-600 ml/min

Viscosity Range Sprayed:

15 to 40 Din4

Fluid Supply: Pressure Feed

Original design specification:

General purpose medium to high production applications
3 to 4 Bar Dynamic air input pressure

Materials of Construction

Molded & Machined Acetal

Part Number: 79374-65 (Air Cap only).

Notes:

98V

CONVENTIONAL



#98V Air Cap:

Type:
Conventional
External Mix


Used on Gun Type: Ransburg Vector and Solo Electrostatic Hand Guns

Used over Fluid Tips:	Hole Size:	Tip Material	Fluid Needle Electrode End	Electrode Material
79377-44	1.4mm	Standard Wear	70430-01	Acetal
79377-144	1.4mm	Extended Wear	70430-01	Acetal
79377-45	1.8mm	Standard Wear	70430-01	Acetal
79377-145	1.8mm	Extended Wear	70430-01	Acetal
79377-46	1.0mm	Standard Wear	70430-01	Acetal
79377-146	1.0mm	Extended Wear	70430-01	Acetal
79377-47	0.7mm	Standard Wear	70430-01	Acetal
79377-147	0.7mm	Extended Wear	70430-01	Acetal
79377-48	1.2mm	Standard Wear	70430-01	Acetal

CONVENTIONAL

Air Consumption Graph

(measured using Vector R90 gun with 1.4mm fluid Tip)

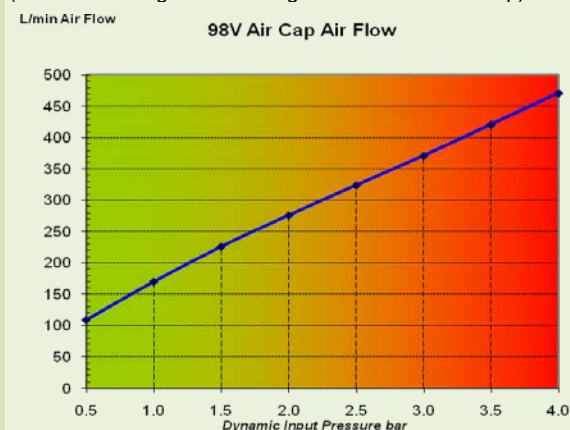

Spray Pattern



Pattern Shape:
Straight Side/Round End

Design Target Distance:
305mm (12")

Approximate Fan Size:

320mm long x 70mm wide @
300 ml/min using 25 sec Din4
@ 200mm (8") Target
Distance

Typical Applications:

Wood, General Industrial, Metal, Lubricants, NDT
Crack Detection, Plastic, Aerospace, Military,
Decorative, Construction, Light Marine, Release
Agent

Typical Fluid Flow Specification:

Medium to Large scale application Air Cap.

200-600 ml/min

Viscosity Range Sprayed:

20 to 40 Din4

Material Supply: Pressure Feed

Original design specification:

General purpose medium to high production applications
3.25 to 4 bar dynamic air input pressure

Materials of Construction

Molded & machined Acetal

Part Number: 79374-98 (Air Cap only).

Notes:

200

HVLP

HVLP




Air Cap Type:
High Volume Low Pressure (HVLP)
External Mix

Used on Gun Type: SRI Gravity Hand Gun

Used over Fluid Tips:	Hole Size:	SRI Fluid Needle
SRI-2-07-K	0.7mm	SRI-37-K
SRI-2-08-K	0.8mm	SRI-37-K
SRI-2-10-K	1.0mm	SRI-3-K
SRI-2-12-K	1.2mm	SRI-3-K

Air Consumption Graph

(Measured using Sri with 0.7mm Fluid Tip)

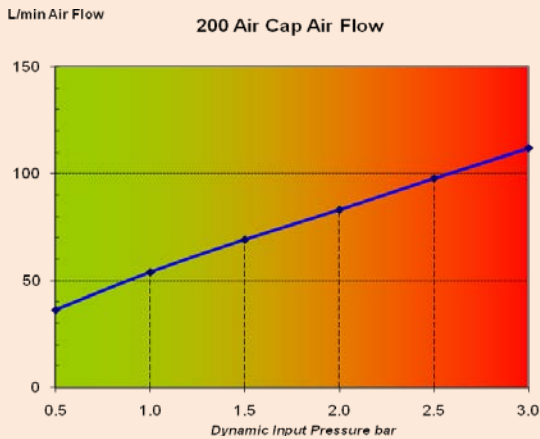

Spray Pattern



Pattern Shape:
Round

Design Target Distance:
150mm (6")

Approximate Fan Size:
5mm dia @ 25mm target distance
5ml/min up to 50mm dia @ 250mm target distance
40ml/min 18 sec Din 4

Typical Applications:

Wood, Metal, Adhesive, Plastic, Aerospace, Decorative, Release Agent

Typical Fluid Flow Specification:

Small scale application Air Cap.

0 – 150 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din4

Material Supply: Gravity Feed

Originally designed for: Solventbased & Waterbased coatings, Small repair, Wooden furniture, adhesive

Materials of Construction Electroless Nickel Plated Hard Brass Air Cap

Part Number: SRI-407-200 (Air Cap & Retaining ring)

Notes:

205

HVLP

HVLP




Air Cap Type:
High Volume Low Pressure (HVLP)
External Mix

Used on Gun Type: SRI Gravity Hand Gun


Used over Fluid Tips:	Hole Size:	SRI Fluid Needle
SRI-2-07-K	0.7mm	SRI-37-K
SRI-2-08-K	0.8mm	SRI-37-K
SRI-2-10-K	1.0mm	SRI-3-K
SRI-2-12-K	1.2mm	SRI-3-K

Air Consumption Graph

(Measured using Sri with 0.7mm Fluid Tip)

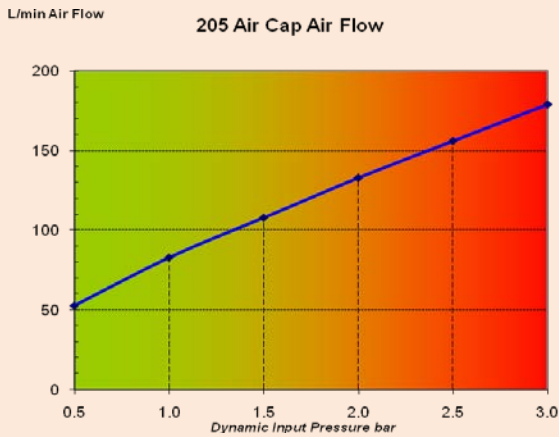

Spray Pattern

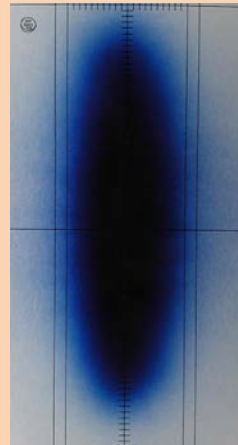

Pattern Shape:
Long Ellipse

Design Target Distance:
150mm (6")

Approximate Fan Size:
150mm long x 30mm wide
@ 100 ml/min 20 sec Din 4

Typical Applications:

Wood, Metal, Adhesive, Plastic, Aerospace, Decorative, Light Marine, Release Agent

Typical Fluid Flow Specification:

Small scale application Air Cap.

0 – 150 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din4

Material Supply: Gravity Feed

Originally designed for: Waterbased coatings, Small repair, Wooden furniture, adhesive

Materials of Construction: Electroless Nickel Plated Hard Brass Air Cap

Part Number: SRI-407-210 (Air Cap & Retaining ring)

Notes:

210

TRANS-TECH

TRANS-TECH



#210 Air Cap:

Type:


Trans-Tech
External Mix

Used on Gun Type: SRI Gravity Hand Gun

Used over Fluid Tips:	Hole Size:	SRI Fluid Needle
SRI-2-07-K	0.7mm	SRI-37-K
SRI-2-08-K	0.8mm	SRI-37-K
SRI-2-10-K	1.0mm	SRI-3-K
SRI-2-12-K	1.2mm	SRI-3-K

Air Consumption Graph

(Measured using Sri with 0.7mm Fluid Tip)

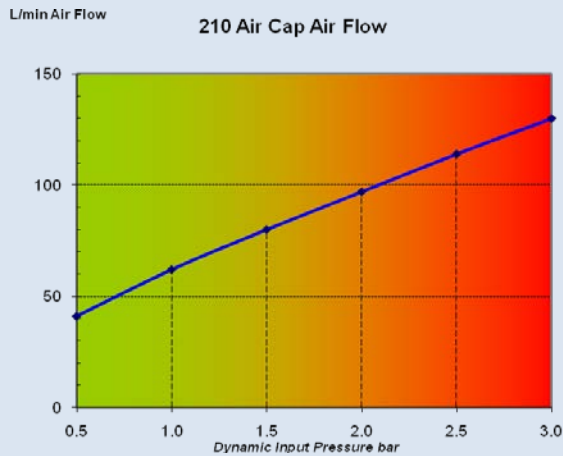

Spray Pattern



Pattern Shape:
Long Ellipse

Design Target Distance:
150mm (6")

Approximate Fan Size:
150mm long x 30mm wide
@ 100 ml/min 20 sec Din 4

Typical Applications:

Wood, Metal, Adhesive, Plastic, Aerospace,
Decorative, Light Marine, Release Agent

Typical Fluid Flow Specification:

Small scale application Air Cap.
0 – 150 ml/min

Viscosity Range Sprayed:
15 to 30 sec Din4

Material Supply: Gravity Feed

Originally designed for: Solventbased materials, Small repair, Wooden furniture, adhesive

Materials of Construction Electroless Nickel Plated Hard Brass Air Cap

Part Number: SRI-407-210 (Air Cap & Retaining ring)

Notes:

430

CONVENTIONAL



#430 Air Cap

Type :
Advanced Conventional.
External Mix

Used on Gun Type: Compact Suction, Gravity & Pressure Hand Guns
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun

Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------


- 0.85mm
- 1.0mm
- 1.2mm
- 1.3mm
- 1.4mm
- 1.6mm
- 1.8mm
- 2.0mm
- 2.2mm

MAKE REFERENCE TO CHART ON PAGE 35

CONVENTIONAL

Air Consumption Graph


(Measured using Cobra 1 Gun and 1.6mm fluid Tip)

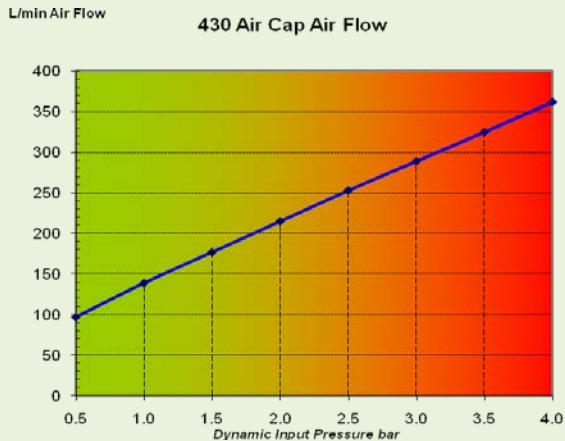

Typical Applications:

Wood, Metal, Adhesive, Aerospace, Military, Decorative, Construction, Light Marine, Release Agent

Spray Pattern

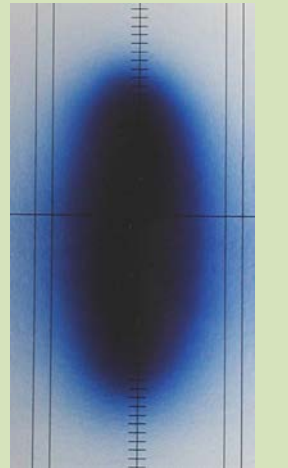

Pattern Shape:
Short Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
200mm long x 80mm wide
@ 280 ml/min 20 sec Din4

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
150 – 300 ml/min

Viscosity Range Sprayed:

15 to 40 sec Din 4

Fluid Supply: Suction/Gravity/Pressure Feed

Original design specification:

General purpose Solventbased coatings. 3bar dynamic inlet Pressure.

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-430-K (Cap & Retaining Ring)

Notes:

443

CONVENTIONAL



#443 Air Cap

Type:
Advanced Conventional.
External Mix

Used on Gun Type: Compact Suction, Gravity & Pressure Hand Guns
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun

Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------


0.85mm
1.0mm
1.2mm
1.3mm
1.4mm
1.6mm
1.8mm
2.0mm
2.2mm

MAKE REFERENCE TO CHART ON PAGE 35

CONVENTIONAL

Air Consumption Graph

(measured using Cobra 1 gun and 1.6mm fluid Tip)

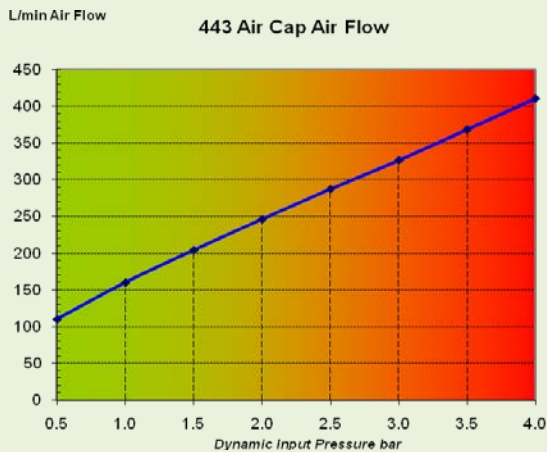

Spray Pattern



Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
300mm long x 60mm wide
@ 240 ml/min 20 sec Din 4

Typical Applications:

Wood, Metal, Adhesive, Plastic, Aerospace, Military, Decorative, Construction, Light Marine, Release Agent

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
200 –300 ml/min

Viscosity Range Sprayed:

15 to 35 sec Din4

Fluid Supply: Suction, Gravity & Pressure Feed

Original design specification:

Solventbased coatings, 3 bar (45 psi) dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-443-K (Air Cap & Retaining Ring)

Notes:

462

CONVENTIONAL



#462 Air Cap:

Type:
Conventional
External Mix

Used on Gun Type: Compact Pressure Hand Gun
Advance-HD Pressure Hand Gun

Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------


2.2mm
2.8mm

MAKE REFERENCE TO CHART ON PAGE 35


CONVENTIONAL

Air Consumption Graph

(measured using Advance-P gun with 2.8mm Fluid Tip)

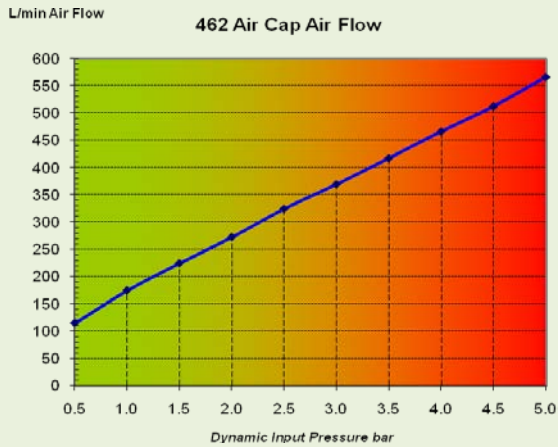

Spray Pattern

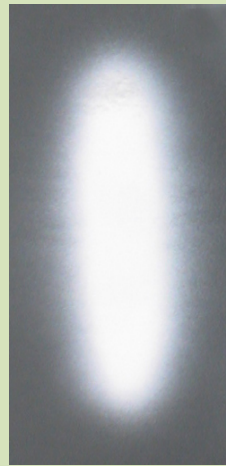

Pattern Shape:
Elliptical

Design Target Distance:
450mm (18")

Approximate Fan Size:
450mm long x 170mm wide @
2800 ml/min using 1.6 kg/Lt
Ceramic Glaze @ 450mm
(18") Target Distance

Typical Applications:

Ceramic, Vitreous Enamel, lubricants and release agents, mastics, wax, sound deadeners

Typical Fluid Flow Specification:

Medium to Large scale application Air Cap.
500-3000 ml/min

Viscosity Range Sprayed:

1.5 – 2.0 kg/Lt

Fluid Supply: Pressure Feed

Original design specification:

Ceramic & Vitreous Enamel, Sanitaryware

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-462-K (Cap & Retaining Ring)

Notes:

470

CONVENTIONAL



#470 Air Cap:

Type:
Conventional
External Mix

Used on Gun Type: Compact Pressure Hand Gun

Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------


2.2mm
2.8mm

MAKE REFERENCE TO CHART ON PAGE 35

CONVENTIONAL

Air Consumption Graph

(measured using Compact gun with 2.8mm Fluid Tip)

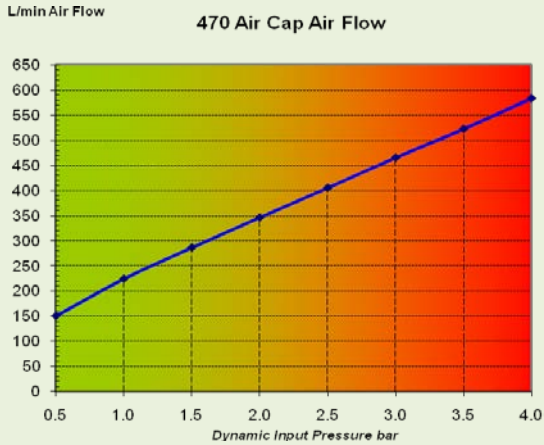

Spray Pattern



Pattern Shape:
Straight Side/Round End

Design Target Distance:
305mm (12")

Approximate Fan Size:
250mm long x 50mm wide @
2000 ml/min using 2.0 kg/Lt
Ceramic Glaze @ 200mm (8")
Target Distance

380mm long x 75mm wide @
2000 ml/min using 2.0 kg/Lt
Ceramic Glaze @ 305mm
(12") Target Distance

Typical Applications:

Ceramic, Vitreous Enamel, lubricants and release agents, mastics, wax, sound deadeners

Typical Fluid Flow Specification:

Medium to Large scale application Air Cap.
500-2000 ml/min

Viscosity Range Sprayed:

1.5 – 2.0 kg/Lt

Fluid Supply: Pressure Feed

Original design specification:

Ceramic & Vitreous Enamel, Sanitaryware

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-470-K (Cap & Retaining Ring)

Notes:

477

CONVENTIONAL

CONVENTIONAL



#477 Air Cap

Advanced Conventional.
External Mix

Used on Compact Pressure Hand Gun
Gun Type: Advance-HD Pressure Hand Gun
 Cobra 1 Automatic Gun
 Cobra 2 Automatic Gun


Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------

0.85mm
 1.0mm
 1.2mm
 1.3mm
 1.4mm
 1.6mm
 1.8mm
 2.0mm
 2.2mm

MAKE REFERENCE TO CHART ON PAGE 35

Air Consumption Graph

(measured using Advance-HD P and 1.0mm Fluid Tip)

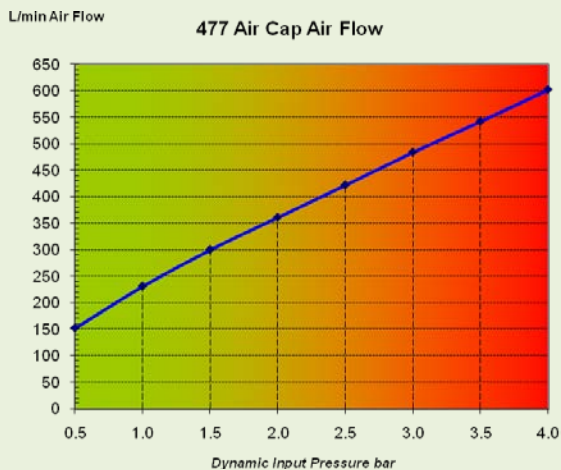

Spray Pattern



Pattern Shape:
 Straight Side/Round End

Design Target Distance:
 200mm (8")

Approximate Fan Size:
 430mm long x 75mm wide @
 320 ml/min 25 sec Din 4 @
 200mm (8") Target Distance

Typical Applications:

Ceramic, Vitreous Enamel, lubricants and release agents, Wood, Metal, Adhesive, Plastic, Aerospace, Military, Construction, Release Agent

Typical Fluid Flow Specification:

Medium to Large production Air Cap.
 200 – 800 ml/min

Viscosity Range Sprayed:

15 to 40 sec Din 4

Fluid Supply: Pressure Feed

Original design specification:

Solventbased coatings. 3bar dynamic inlet Pressure.

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-477-K (Cap & Retaining Ring)

Notes:

480

CONVENTIONAL



#480 Air Cap

Advanced Conventional.
External Mix

Used on Gun Type: Compact Pressure Hand Gun
Advance-HD Pressure Hand Gun
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun
C3 Automatic Gun


Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle	C3 Fluid Needle
0.5mm					
0.7mm					
1.0mm					

MAKE REFERENCE TO CHART ON PAGE 35


CONVENTIONAL

Air Consumption Graph

(measured using Advance-HD P and 1.0mm Fluid Tip)

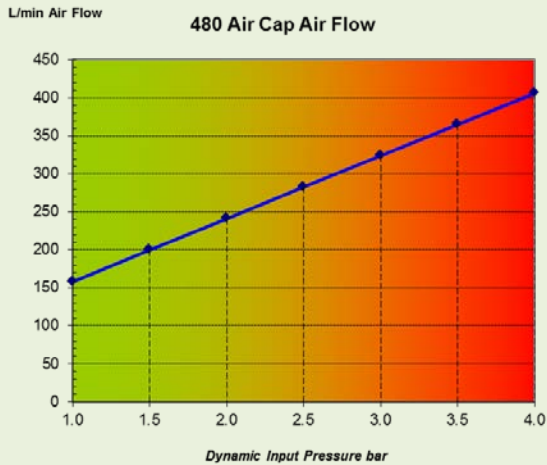

Spray Pattern

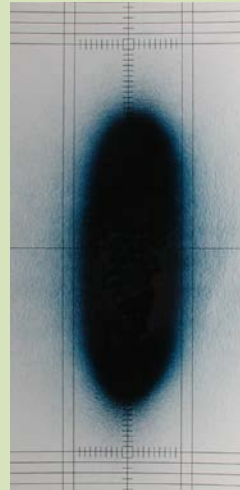

Pattern Shape: Straight Side/Round End

Design Target Distance: 200mm (8")

Approximate Fan Size: 260mm long x 80mm wide @ 220 ml/min 18 sec Din 4 @ 200mm (8") Target Distance

Typical Applications:

Wood, Metal, Adhesive, Plastic, Aerospace, Decorative

Typical Fluid Flow Specification:

Small to medium production Air Cap.

100 – 250 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Fluid Supply: Pressure Feed

Original design specification:

Low viscosity Solventbased coatings on Cell Phones, Camera casings & Computer parts using C3 gun.

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap
Black Anodised aluminium Retaining ring

Part Number: SP-100-480-ADVB-K (Cap & Retaining Ring)

Notes:

497

CONVENTIONAL



#497 Air Cap

Advanced Conventional.
External Mix

Used on Gun Type: Compact Pressure Hand Gun
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun

Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------


0.85mm
1.0mm
1.2mm
1.3mm
1.4mm
1.6mm
1.8mm
2.0mm
2.2mm

MAKE REFERENCE TO CHART ON PAGE 35

CONVENTIONAL

Air Consumption Graph

(measured using Cobra 1 gun and 1.6mm Fluid Tip)

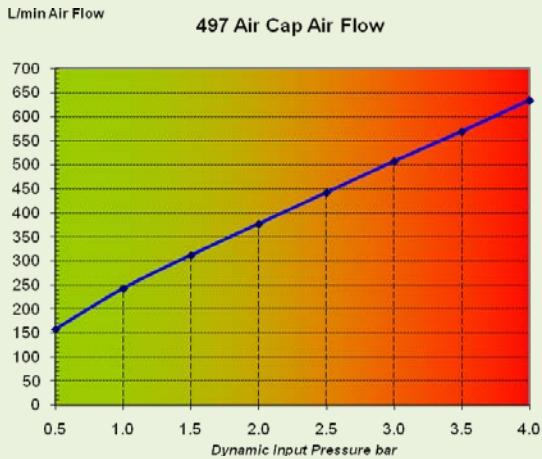

Spray Pattern



Pattern Shape: Straight Side/Tapered End

Design Target Distance: 305mm (12")

Approximate Fan Size: 230mm long x 45mm wide @ 350 ml/min 20 sec Din 4 @ 200mm (8") Target Distance

350mm long x 80mm wide @ 350 ml/min 20 sec Din 4 @ 305mm (12") Target Distance

Typical Applications:

Wood, Metal, Adhesive, Plastic, Aerospace, Military, Construction, Light Marine, Release Agent

Typical Fluid Flow Specification:

Medium to Large production Air Cap.

200 – 800 ml/min

Viscosity Range Sprayed:

15 to 40 sec Din 4

Fluid Supply: Pressure Feed

Original design specification:

Solventbased coatings. 3bar dynamic inlet Pressure.

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-497-K (Cap & Retaining Ring)

Notes:

500R

HVLP

HVLP



#500 Air Cap

Type :
High Volume Low Pressure.
External Mix

Used on Compact Suction, Gravity & Pressure Hand Guns
Gun Type: Cobra 1 Automatic Gun
Cobra 2 Automatic Gun


Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------

0.85mm
1.0mm
1.2mm
1.3mm
1.4mm
1.6mm
1.8mm
2.0mm
2.2mm

MAKE REFERENCE TO CHART ON PAGE 35

Air Consumption Graph

(Measured using Compact-P with 1.6mm Fluid Tip)

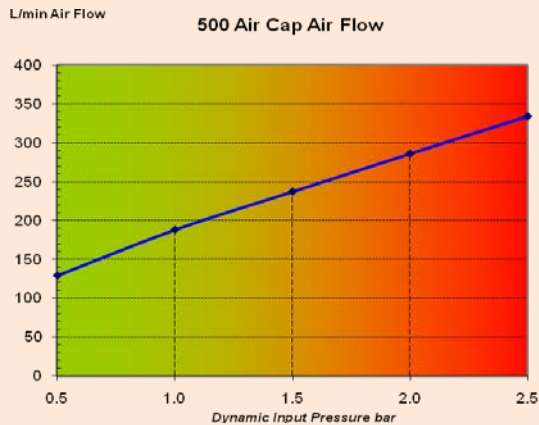

Spray Pattern



Pattern Shape:
Round

Design Target Distance:
50mm (2") to 450mm (18")

Approximate Fan Size:

15mm diameter @ 150mm/6" target distance & 20 ml/min up to 70mm dia @ 450mm/18" target distance & 80ml/min (18 sec Din 4)

Typical Applications:

Wood, Ceramic, Adhesive

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
50 – 150 ml/min

Viscosity Range Sprayed:

15 to 25 sec Din 4

Fluid Supply: Suction, Gravity & Pressure Feed

Original design specification:

Ceramic Tableware application. Small to medium production.
2bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-500R-K (Cap & Retaining Ring).

Notes:

505

HVLP

HVLP



#505 Air Cap

Type :
High Volume Low Pressure.
External Mix

Used on Gun Type: Compact Suction, Gravity & Pressure Hand Guns
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun


Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------

- 0.85mm
- 1.0mm
- 1.2mm
- 1.3mm
- 1.4mm
- 1.6mm
- 1.8mm
- 2.0mm
- 2.2mm


MAKE REFERENCE TO CHART ON PAGE 35

Air Consumption Graph

(Measured using Cobra 1 with 1.6mm Fluid Tip)

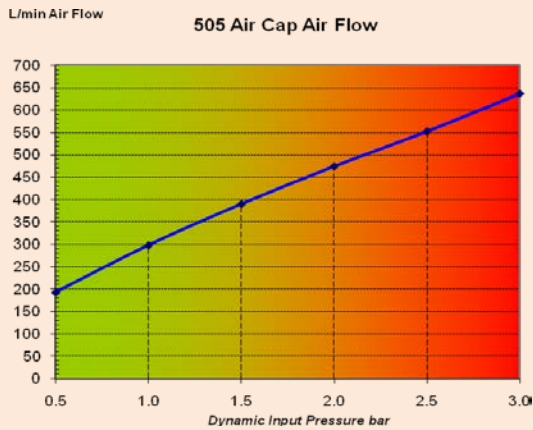

Spray Pattern

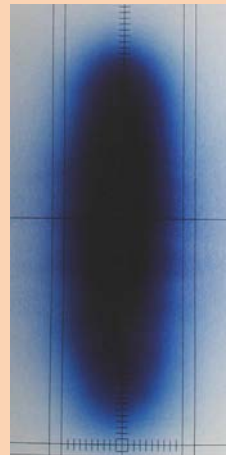

Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
270mm long x 60mm wide @ 200 ml/min 20 sec Din 4

Typical Applications:

Wood, Ceramic, Adhesive Plastic, Aerospace, Decorative, Release Agent

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
150 – 250 ml/min

Viscosity Range Sprayed:

15 to 25 sec Din 4

Fluid Supply: Suction, Gravity & Pressure Feed

Original design specification:

Solventbased & Waterbased coatings. Long Elliptical pattern, Small to medium production. 2bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-505-K (Cap & Retaining Ring)

Notes:

510+

TRANS-TECH



#510+ Air Cap

Type :
Compliant/Trans-Tech.
External Mix

Used on Gun Type: Advance-HD Suction, Gravity & Pressure Hand Guns
Compact Suction, Gravity & Pressure Hand Guns
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun

Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------


0.85mm
1.0mm
1.2mm
1.3mm
1.4mm
1.6mm
1.8mm
2.0mm
2.2mm

MAKE REFERENCE TO CHART ON PAGE 35

TRANS-TECH

Air Consumption Graph

(Measured using Cobra 1 with 1.6mm Fluid Tip)

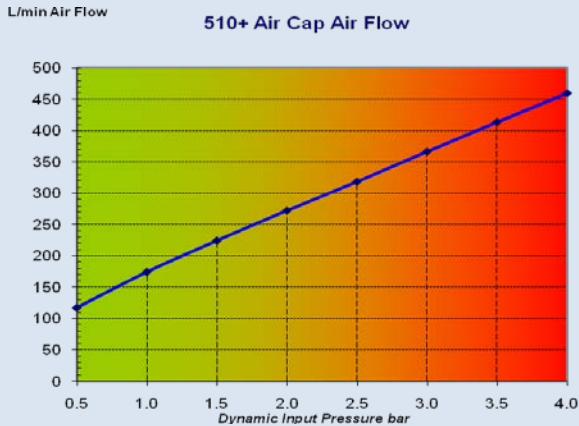

Spray Pattern



Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
270mm long x 60mm wide
@ 200 ml/min 20 sec Din 4

Typical Applications:

Wood, Metal, Ceramic, Adhesive, Plastic,
Aerospace, Military, Decorative, Construction,
Light Marine, Release Agent

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.

150 – 250 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Fluid Supply: Suction, Gravity & Pressure Feed

Original design Specification:

Solventbased coatings. Long Elliptical pattern, Small to medium production 2bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-510-K (Cap & Retaining Ring)

Notes:

The original October 2003 510 air cap was modified and re-launched in April 2008 as the 510+ for manufacturing and production changes. No changes in atomization or general performance will be experienced between the two air caps. All part numbers and references remain the same as the original 510.

513

TRANS-TECH

TRANS-TECH



#513 Air Cap

Type :
Compliant/Trans-Tech.
External Mix

Used on Gun Type: Compact Pressure Hand Gun
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun


Fluid Tip Size:	Compact Advance-Fluid Needle	HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	------------------------------	-----------------	----------------------	----------------------

0.85mm
1.0mm
1.2mm
1.3mm
1.4mm
1.6mm
1.8mm
2.0mm
2.2mm

MAKE REFERENCE TO CHART ON PAGE 35

Air Consumption Graph

(Measured using Cobra 1 with 1.6mm Fluid Tip)

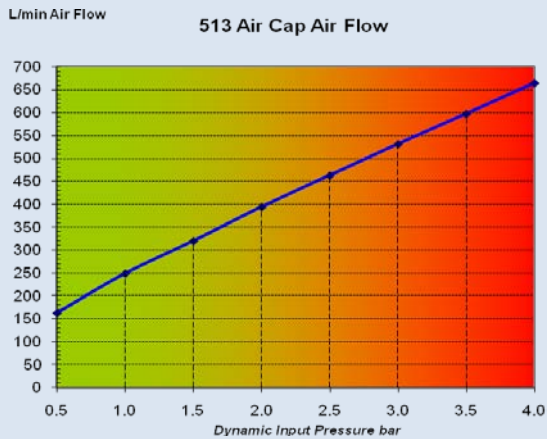

Spray Pattern



Pattern Shape:
Straight Side/Round End

Design Target Distance:
305mm (12")

Approximate Fan Size:
230mm long x 45mm wide @
350 ml/min 20 sec Din 4 @
200mm (8") Target Distance

350mm long x 80mm wide @
350 ml/min 20 sec Din 4 @
305mm (12") Target Distance

Typical Applications:

Wood, Metal, Plastic, Leather, Release Agent

Typical Fluid Flow Specification:

Medium to Large production Air Cap.
200 – 800 ml/min

Viscosity Range Sprayed:

15 to 40 sec Din 4

Fluid Supply: Pressure Feed

Original design specification:

Waterbased coatings – Leather & Soft Touch. Medium to Large production Air Cap. 3bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring, Polyethylene air seal, Acetal anti-friction seal.


Part Number: SP-100-510-K (Cap & Retaining Ring/Seals).
SPK-102-K Spare Retaining Ring and seals.

Notes:

515

TRANS-TECH

TRANS-TECH



Air Cap Type:

Compliant/Trans-Tech.
External Mix

Used on Compact Pressure Hand Gun
Gun Type: Cobra 1 Automatic Gun
Cobra 2 Automatic Gun


Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------

- 0.85mm
- 1.0mm
- 1.2mm
- 1.3mm
- 1.4mm
- 1.6mm
- 1.8mm
- 2.0mm
- 2.2mm

MAKE REFERENCE TO CHART ON PAGE 35

Air Consumption Graph

(Measured on Advance-HD P with 1.2mm Fluid Tip)

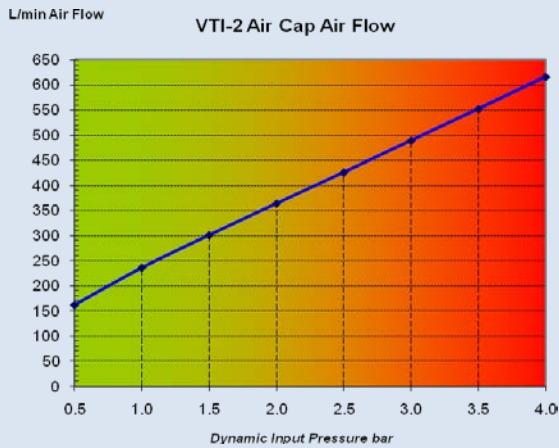

Spray Pattern



Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
320mm long x 90mm wide
@ 250 ml/min 20 sec Din 4

Typical Applications:

Wood, Metal, Ceramic, Plastic, Aerospace, Military, Construction, Light Marine, Release Agent

Typical Fluid Flow Specification:

Medium scale application Air Cap.

200 – 400 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Fluid Supply: Pressure Feed

Original design Specification:

Solventbased coatings. Long Elliptical pattern. Medium production Air Cap. 2bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring, Polyethylene air seal, Acetal anti-friction seal.

Part Number: SP-100-515-K (Cap & Retaining Ring).

Notes:

520

TRANS-TECH

TRANS-TECH



#520 Air Cap

Type :
Compliant/Trans-Tech.
External Mix

Used on Gun Type: Advance-HD Suction, Gravity & Pressure Hand Guns
Compact Suction, Gravity & Pressure Hand Guns
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun

Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------

- 0.85mm
- 1.0mm
- 1.2mm
- 1.3mm
- 1.4mm
- 1.6mm
- 1.8mm
- 2.0mm
- 2.2mm

MAKE REFERENCE TO CHART ON PAGE 35

Air Consumption Graph

(Measured using Advance-HD G with 1.4mm Fluid Tip)



Spray Pattern



Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
280mm long x 70mm wide
@ 200 ml/min 20 sec Din 4

Typical Applications:

Wood, Metal, Ceramic, Adhesive, Plastic, Aerospace, Military, Decorative, Construction, Light Marine, Release Agent

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.

150 – 250 ml/min

Viscosity Range Sprayed:

15 to 20 sec Din 4

Fluid Supply: Suction, Gravity & Pressure Feed

Original design Specification:

Solventbased coatings. Long Elliptical pattern, Small to medium production 2bar dynamic inlet Pressure, Lower viscosity coatings

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-520-K (Cap & Retaining Ring)

Notes:

A modification of the 510 air cap. A change of hole diameters increased the stability and shape of the fan shape when using lower viscosity coatings.

522

TRANS-TECH

TRANS-TECH



#522 Air Cap

Type:
Compliant/Trans-Tech.
External Mix

Used on Compact Pressure Hand Gun
Gun Type: Cobra 1 Automatic Gun
Cobra 2 Automatic Gun


Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------

- 0.85mm
- 1.0mm
- 1.2mm
- 1.3mm
- 1.4mm
- 1.6mm
- 1.8mm
- 2.0mm
- 2.2mm

MAKE REFERENCE TO CHART ON PAGE 35

Air Consumption Graph

(Measured using Cobra 1 with 1.6mm Fluid Tip)

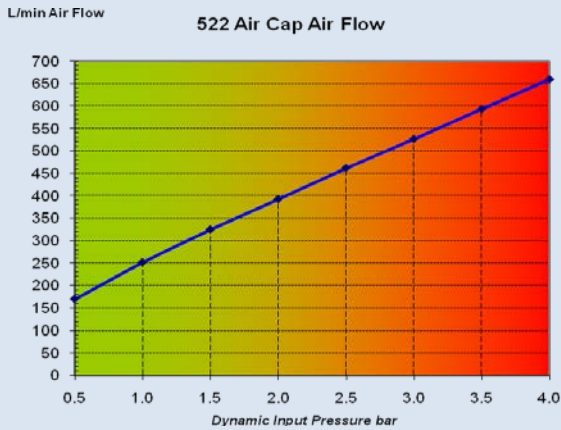

Spray Pattern



Pattern Shape:
Straight Side/Tapered End

Design Target Distance:
305mm (12")

Approximate Fan Size:
230mm long x 45mm wide @
350 ml/min 20 sec Din 4 @
200mm (8") Target Distance

350mm long x 80mm wide @
350 ml/min 20 sec Din 4 @
305mm (12") Target Distance

Typical Applications:

Wood, General Industrial, Metal, Plastic, Adhesive, Aerospace, Leather, Military, Construction, Light Marine, Release Agents.

Typical Fluid Flow Specification:

Medium to Large production Air Cap.
200 – 800 ml/min

Viscosity Range Sprayed:
15 to 40 sec Din 4

Fluid Supply: Pressure Feed

Original design specification:

Solventbased coatings. Long Elliptical pattern. Medium to Large production Air Cap 3bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring, Polyethylene air seal, Acetal anti-friction seal.

Part Number: SP-100-522-K (Cap & Retaining Ring).

Notes:

523

TRANS-TECH

TRANS-TECH



Air Cap Type:

Compliant/Trans-Tech.
External Mix

Used on Compact Pressure Hand Gun
Gun Type: Cobra 1 Automatic Gun
Cobra 2 Automatic Gun


Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
0.85mm				
1.0mm				
1.2mm				
1.3mm				
1.4mm				
1.6mm				
1.8mm				
2.0mm				
2.2mm				

0.85mm
1.0mm
1.2mm
1.3mm
1.4mm
1.6mm
1.8mm
2.0mm
2.2mm


MAKE REFERENCE TO CHART ON PAGE 35

Air Consumption Graph

(Measured on Cobra 1 with 1.6mm Fluid Tip)

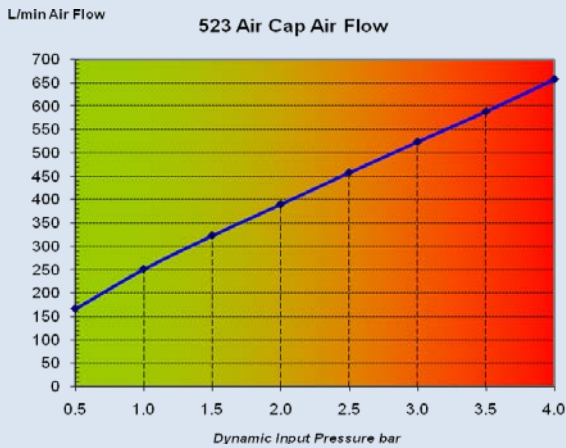

Spray Pattern

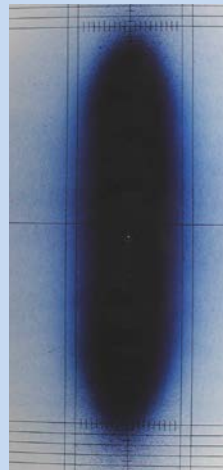

Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
310mm long x 80mm wide
@ 250 ml/min 20 sec Din 4

Typical Applications:

Wood, Metal, Ceramic, Plastic, Aerospace, Military, Construction, Light Marine, Release Agent

Typical Fluid Flow Specification:

Medium scale application Air Cap.
200 – 400 ml/min

Viscosity Range Sprayed:
15 to 30 sec Din 4

Fluid Supply: Pressure Feed

Original design Specification: Solventbased coatings. Long Elliptical pattern. Medium production Air Cap. 3bar dynamic inlet Pressure

Materials of Construction Electroless Nickel Plated Brass Air Cap and Retaining Ring, Polyethylene air seal, Acetal anti-friction seal.

Part Number: SP-100-523-K (Cap & Retaining Ring).

Notes:

590

TRANS-TECH

TRANS-TECH



#590 Air Cap:

Type:
Trans-Tech
External Mix

Used on Compact Pressure Hand Gun
Gun Type: Cobra 1 Automatic Gun
Cobra 2 Automatic Gun


Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------

1.0mm
0.7mm
0.5mm


MAKE REFERENCE TO CHART ON PAGE 35

Air Consumption Graph

(Measured using Compact-G with 0.7mm Fluid Tip)

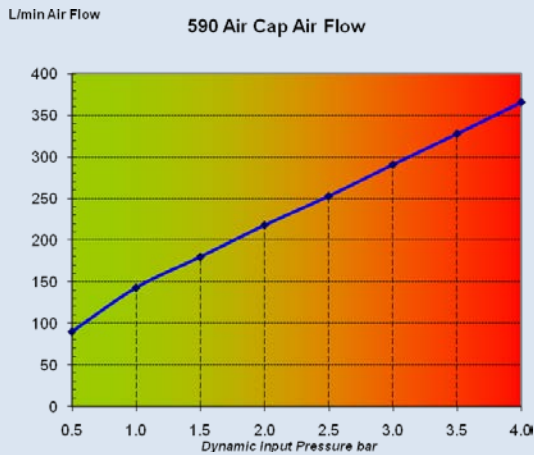

Spray Pattern

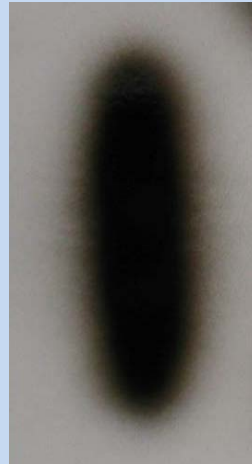

Pattern Shape:
Straight Side/Round End

Design Target Distance:
100mm (4")

Approximate Fan Size:
150mm long x 30mm wide
@ 100 ml/min 20 sec Din 4

Typical Applications:

Wood, Metal, Adhesive, Plastic, Aerospace

Typical Fluid Flow Specification:

Small scale application Air Cap.

0 – 150 ml/min

Viscosity Range Sprayed:

20 to 30 sec Din4

Material Supply: Pressure Feed

Original design specification:

Cosmetic containers. Straight side/round end pattern, automatic machines, 1.5bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-590-K (Cap & Retaining Ring).

Notes:

590HV

HVLP

TRANS-TECH



#590HV Air Cap:

Type:
HVLP
External Mix

Used on Compact Pressure Hand Gun
Gun Type: Advance Pressure Hand Gun
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun


Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------

1.0mm
0.7mm
0.5mm

MAKE REFERENCE TO CHART ON PAGE 35

Air Consumption Graph

(Measured using Advance-G with 1.0mm Fluid Tip)

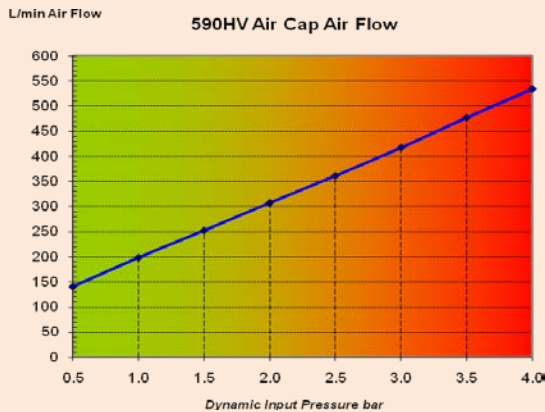

Spray Pattern



Pattern Shape:
Straight Side/Round End

Design Target Distance:
150mm (6")

Approximate Fan Size:
120mm long x 30mm wide
@ 80 ml/min 16 sec Din 4
@ 2bar inlet pressure

150mm long x40mm wide
@ 140ml/min 16 sec Din4
@ 3 bar inlet pressure

Typical Applications:

Wood, Metal, Adhesive, Plastic, Aerospace

Typical Fluid Flow Specification:

Very small scale application Air Cap.
0 – 150 ml/min

Viscosity Range Sprayed:
14 to 18 sec Din4

Material Supply: Pressure Feed

Original design specification:

Cosmetic containers. Straight side/round end pattern, automatic machines, Very low viscosity, high sparkle metallics

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-590HV-K (Cap & Retaining Ring).

Notes:

Designed as an HVLP air cap but normally to be used >0.7bar (10psi) air cap pressure for normal applications. 0.9bar dynamic inlet Pressure = 10psi

591+

TRANS-TECH

TRANS-TECH



#591 Air Cap:

Type:
Compliant/Trans-Tech
External Mix

Used on Compact Pressure Hand Gun
Gun Type: Advance Pressure Hand Gun
Cobra 1 Automatic Gun
Cobra 2 Automatic Gun

Fluid Tip Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
-----------------	----------------------	-------------------------	----------------------	----------------------

1.0mm
0.7mm
0.5mm


**MAKE REFERENCE TO
CHART ON PAGE 35**

Air Consumption Graph


(Measured using Compact-G with 0.7mm Fluid Tip)

L/min Air Flow

591 Air Cap Air Flow

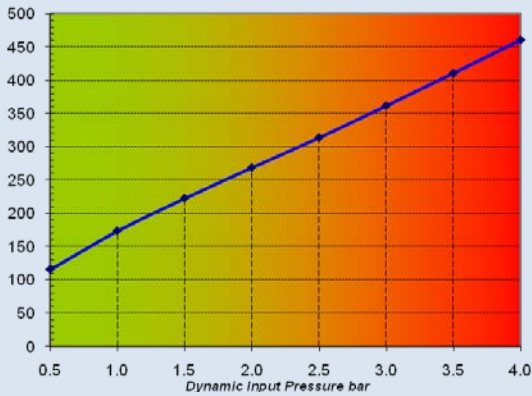

Spray Pattern

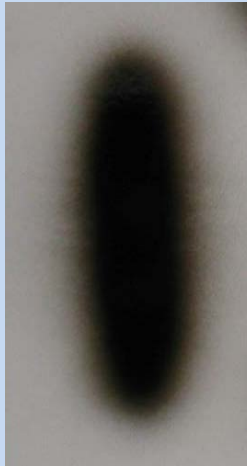

Pattern Shape:
Straight Side/Round End

Design Target Distance:
100mm (4")

Approximate Fan Size:
200mm long x 50mm wide
@ 100 ml/min 20 sec Din 4

Typical Applications:

Wood, Metal, Adhesive, Plastic, Aerospace

Typical Fluid Flow Specification:

Small scale application Air Cap.

0 – 150 ml/min

Viscosity Range Sprayed:

15 to 20 sec Din4

Material Supply: Pressure Feed

Original design specification:

Cosmetic containers. Straight side/round end pattern, automatic machines, 1.5bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Hard Brass Air Cap

Part Number: SP-100-590-K (Cap & Retaining Ring).

Notes:

Original 591 Air Cap launched in March 2007. Fan stability improved and relaunched in April 2008 as 591+. All part numbers and references remain the same as the original 591.

COMPACT, ADVANCE-HD, COBRA 1 & COBRA 2 FLUID NEEDLES & TIPS

THE COMPACT AND ADVANCE-HD SPRAY GUNS UTILISE COMMON AIR CAPS AND FLUID TIPS. HOWEVER THE FLUID NEEDLES ARE INDIVIDUAL TO EACH SPECIFIC GUN BODY DESIGN. USE THE FOLLOWING TABLE TO DOUBLE CHECK THAT PART NUMBERS FOR THESE COMPONENTS ARE CORRECT.

Air Cap Part Number	Used over Fluid Tips:	Hole Size:	Compact Fluid Needle	Advance-HD Fluid Needle	Cobra 1 Fluid Needle	Cobra 2 Fluid Needle
SP-100-590 SP-100-591 SP-100-590HV SP-100-480-ADVB-K	SP-259S-05 SP-259S-07 SP-259S-10	0.5mm 0.7mm 1.0mm	SP-300S-05 SP-300S-07 SP-300S-10	ADV-310-05 ADV-310-07 ADV-310-10	SPA-310-05 SPA-310-07 SPA-310-10	SPA-320-05 SPA-320-07 SPA-320-10
SP-100-430 SP-100-443 SP-100-477 SP-100-497 SP-100-505 SP-100-500 SP-100-510 SP-100-522 SP-100-523 SP-100-513	SP-200S-085 SP-200S-10 SP-200S-11 SP-200S-12 SP-200S-13 SP-200S-14 SP-200S-16 SP-200S-18 SP-200S-20 SP-200S-22	0.85mm 1.0mm 1.1mm 1.2mm 1.3mm 1.4mm 1.6mm 1.8mm 2.0mm 2.2mm	SP-300S-085 SP-300P-10* SP-300S-10 SP-300P-10* SP-300S-11 SP-300P-12* SP-300S-12 SP-300P-12* SP-300S-13 SP-300P-14* SP-300S-14 SP-300P-14* SP-300N-14 SP-300S-16 SP-300S-18 SP-300N-18 SP-300S-20 SP-300S-22 SP-300N-22	ADV-310-085 ADV-310P-10* ADV-310-10 ADV-310P-10* Not Available ADV-310P-12* ADV-310-12 ADV-310P-12* Not Available ADV-310P-14* ADV-310-14 ADV-310P-14* ADV-310N-14 ADV-310-16 ADV-310-18 ADV-310N-18 ADV-310-20 ADV-310-22 ADV-310N-22	SPA-310-85 SPA-310P-10* SPA-310-10 SPA-310P-10* Not Available Not Available SPA-310-12 Not Available Not Available SPA-310P-14* SPA-310-14 SPA-310P-14* Not Available SPA-310-16 SPA-310-18 Not Available Not Available SPA-310-22 Not Available	SPA-320-85 SPA-320P-10* SPA-320-10 SPA-320P-10* Not Available Not Available SPA-320-12 Not Available Not Available SPA-320P-14* SPA-320-14 SPA-320P-14* Not Available SPA-320-16 SPA-320-18 Not Available Not Available SPA-320-22 Not Available
SP-100-470 SP-100-462	SP-247S-22 SP-247N-22 SP-247C-22 SP-247S-28 SP-247N-28 SP-247C-28	2.2mm 2.2mm 2.2mm 2.8mm 2.8mm 2.8mm	SP-300S-22 SP-300N-22 SP-300C-22 SP-300S-28 SP-300N-28 SP-300C-28	ADV-310-22 ADV-310N-22 ADV-310C-22 ADV-310-28 ADV-310N-28 ADV-310C-28	Not Available Not Available Not Available Not Available Not Available Not Available	Not Available Not Available Not Available Not Available Not Available Not Available

Notes:

- S designation denotes High Grade Stainless Steel profile
- P designation denotes Delrin profile
- N designation denotes Nitride Hardened profile
- C designation denotes Tungsten carbide (Carballoy) profile

- *1.0mm Plastic Tip Needle is suitable for 0.85 & 1.0 fluid Tips
- 1.2mm Plastic Tip Needle is suitable for 1.1 & 1.2 fluid Tips
- 1.4mm Plastic Tip Needle is suitable for 1.3 & 1.4 fluid Tips

622

TRANS-TECH

TRANS-TECH



#622 Air Cap:


Type:
Compliant/Trans-Tech
External Mix

Used on Gun Type: FLG Pressure Feed Spray Gun


Used over Fluid Tips:	Hole Size:	Pressure Fluid Needle
SGK-0012-14	1.4mm	SGK-0402-14

Air Consumption Graph

(measured using FLG-P gun with 1.4mm fluid Tip)

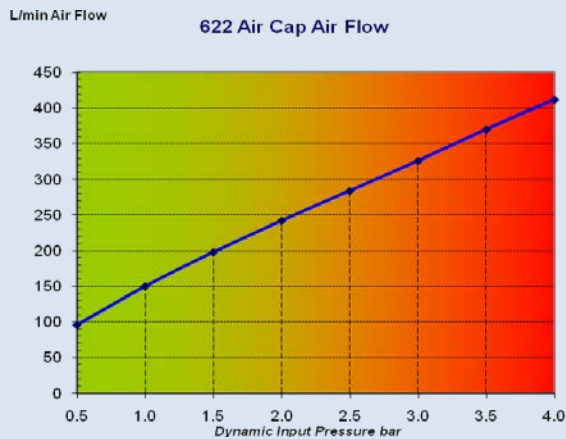

Spray Pattern

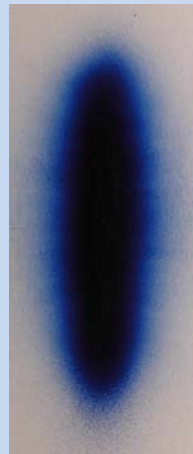

Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
265mm long x 60mm wide @
260 ml/min using 25 sed Din4
@ 200mm (8") Target
Distance

Typical Applications:

Wood, General Industrial, Lubricants, Adhesive,
Decorative, Release Agent

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
50-300 ml/min

Viscosity Range Sprayed:

15 to 35 sec Din 4

Material Supply:

Pressure Feed

Original design specification:

General Purpose application Air Cap
2 bar nominal handle inlet pressure

Materials of Construction:

Electroless Nickel Plated Brass Air Cap

Part Number: FLG-0001-622 Air Cap (only).

Notes:

FLG-5 Guns fitted with #5 Air Cap require different internal Air Baffle to guns fitted with #622 Air Cap

C1

CONVENTIONAL



#C1 Air Cap:

Type:
Conventional
External Mix

Used on Gun Type: JGA-HD & GFG-HD Suction, Pressure & Gravity Feed Spray Guns, AG361 & AG362 Automatic Guns


Used over Fluid Tips:	GFG-HD Fluid Needle	JGA-HD Suction Fluid Needle	JGA-HD Pressure Fluid Needle
PROC-230-085*	Not Available	Not Available	PRO-305-085-10*
PROC-230-10*	Not Available	Not Available	PRO-305-085-10*
PROC-230-12*	Not Available	Not Available	PRO-305-12-14*
PROC-230-14*	Not Available	Not Available	PRO-305-12-14*
PROC-220-14	GFGPRO-320	JGAPRO-330	JGAPRO-330
PROC-220-16	GFGPRO-320	JGAPRO-330	JGAPRO-330
PROC-220-18	GFGPRO-320	JGAPRO-330	JGAPRO-330

For AG-360 series automatic spray gun needles see page 62

CONVENTIONAL

Air Consumption Graph

(measured using JGA-HD gun with 1.4mm fluid Tip)

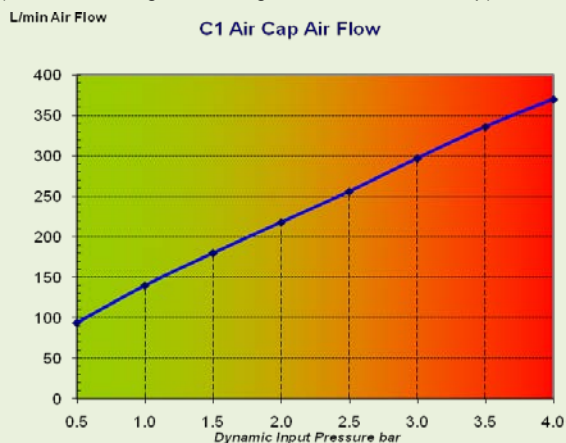

Spray Pattern



Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
270mm long x 65mm wide @
220 cc/min using 25 sec Din4
@ 200mm (8") Target
Distance

Typical Applications:

Wood, General Industrial, Metal, Adhesive, Plastic, Aerospace, Leather, Military, Decorative, Construction, Light Marine

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
150-250 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din4

Material Supply:

Suction, Gravity or Pressure Feed

Original design specification:

High Quality metallic Topcoats, Suction/Gravity application
2.5 to 3.0 bar nominal handle inlet pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap

Part Number: PROC-120-C1-K Air Cap & Retaining Ring

Notes:

*Originally designed for pressure feed applications

C2

CONVENTIONAL

CONVENTIONAL



#C2 Air Cap:

Type:
Conventional
External Mix


Used on Gun Type: JGA-HD & GFG-HD Suction, Pressure & Gravity Feed Spray Guns, AG361 & AG362 Automatic Guns

Used over Fluid Tips:	GFG-HD Fluid Needle	JGA-HD Suction Fluid Needle	JGA-HD Pressure Fluid Needle
PROC-230-085*	Not Available	Not Available	PRO-305-085-10*
PROC-230-10*	Not Available	Not Available	PRO-305-085-10*
PROC-230-12*	Not Available	Not Available	PRO-305-12-14*
PROC-230-14*	Not Available	Not Available	PRO-305-12-14*
PROC-220-14	GFGPRO-320	JGAPRO-330	JGAPRO-330
PROC-220-16	GFGPRO-320	JGAPRO-330	JGAPRO-330
PROC-220-18	GFGPRO-320	JGAPRO-330	JGAPRO-330

For AG-360 series automatic spray gun needles see page 62

Air Consumption Graph

(measured using JGA-HD gun with 1.8mm fluid Tip)

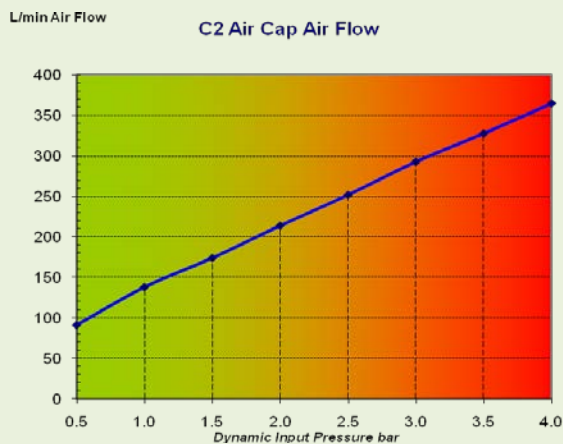

Spray Pattern



Pattern Shape:
Short Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
250mm long x 70mm wide @
220 cc/min using 25 sec Din4
@ 200mm (8") Target
Distance

Typical Applications:

Wood, General Industrial, Metal, Ceramic, Vitreous Enamel, Lubricants, Adhesive, Plastic, Aerospace, Leather, Military, Decorative, Construction, Light Marine, Release Agent, Wax

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
100-350 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din4

Material Supply:

Suction, Gravity or Pressure Feed

Original design specification:

General Purpose Top coat and Primer Applications
2.5 – 4.0 bar nominal handle inlet pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap

Part Number: PROC-120-C2-K Air Cap & Retaining Ring

Notes:

*Originally designed for pressure feed applications

C3

CONVENTIONAL

CONVENTIONAL



#C3 Air Cap:

Type:
Conventional
External Mix

Used on Gun Type: JGA-HD Pressure Feed Spray Guns, AG361 & AG362 Automatic Guns


Used over Fluid Tips: JGA-HD Pressure Fluid Needle

PROC-230-085*	PRO-305-085-10*
PROC-230-10*	PRO-305-085-10*
PROC-230-12*	PRO-305-12-14*
PROC-230-14*	PRO-305-12-14*
PROC-220-14	JGAPRO-330
PROC-220-16	JGAPRO-330
PROC-220-18	JGAPRO-330


For AG-360 series automatic spray gun needles see page 62

Air Consumption Graph

(measured using JGA-HD gun with 1.4mm fluid Tip)

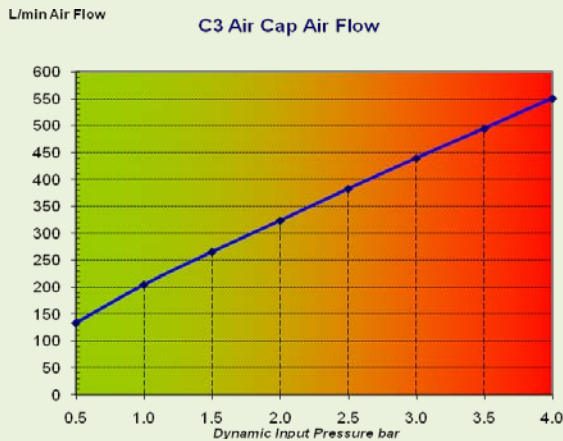

Spray Pattern

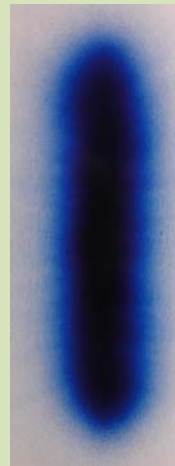

Pattern Shape:
Straight Side/Tapered Ends

Design Target Distance:
250mm (10")

Approximate Fan Size:
360mm long x 70mm wide @
400 ml/min using 25 sed Din4
@ 200mm (8") Target
Distance

290mm long x 65mm wide @
240 ml/min using 25 sec Din4
@ 200mm (8") Target
Distance

Typical Applications:

Wood, General Industrial, Metal, Ceramic, Vitreous Enamel, Lubricants, Adhesive, Plastic, Aerospace, Military, Decorative, Construction, Light Marine, Release Agent, Wax

Typical Fluid Flow Specification:

Medium to Large scale application Air Cap.
250-600 ml/min

Viscosity Range Sprayed:

15 to 40 sec Din4

Material Supply:

Pressure Feed

Original design specification:

Solventbased coatings
2.5 – 4.0 bar nominal air inlet pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap

Part Number: PROC-120-C3-K Air Cap and retaining ring

Notes:

*Originally designed for pressure feed applications

C62

CONVENTIONAL

CONVENTIONAL



#C62 Air Cap:

Type:
Conventional
External Mix


Used on Gun Type: AG-361E Pressure Feed Automatic Spray Gun and PRO Lite E Ceramic Hand Gun

Used over Fluid Nozzles:	PRO Lite E Fluid Needle	Construction
PRO-250-28 PRO-250N-28 PRO-250C-28	PRO-350-28 PRO-350N-28 PRO-350C-28	Stainless Steel Nitride Hardened Stainless Steel Stainless Steel with Tungsten Carbide insert

For AG-361E automatic spray gun needles see page 62

Air Consumption Graph

(measured using PRO Lite E gun with 2.8mm fluid nozzle)

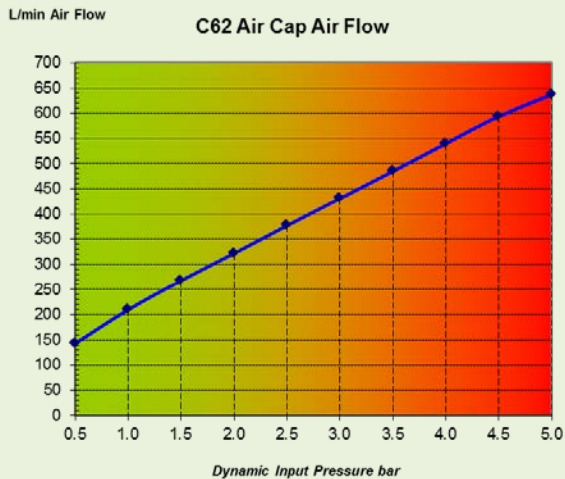

Typical Applications:

Ceramic, Vitreous Enamel, Adhesive, Release Agent, Wax

Spray Pattern



Pattern Shape:
Straight Side/Tapered Ends

Design Target Distance:
305mm (12")

Approximate Max Fan Size:
490mm long x 110mm wide @
2200 ml/min using 1.7kg/Ltr
Glaze @ 305mm (12") Target
Distance

520mm long x 140mm wide @
3000 ml/min using 1.7kg/Ltr
Glaze @ 305mm (12") Target
Distance

Typical Fluid Flow Specification:

Medium to Large scale application Air Cap.
1000-3500 ml/min

Viscosity Range Sprayed:

1.5 – 1.8 kg/Lt

Material Supply:

Pressure Feed

Original design specification:

Ceramic & Enamel waterbased coatings
3.0 – 7.0 bar nominal air inlet pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap

Part Number: PROC-120-C62 Air Cap and retaining ring

Notes:

C64

CONVENTIONAL

CONVENTIONAL



#C64 Air Cap:

Type:
Conventional
External Mix


Used on Gun Type: AG-361E Pressure Feed Automatic Spray Gun and PRO Lite E Ceramic Hand Gun

Used over Fluid Nozzles:	PRO Lite E Fluid Needle	Construction
PRO-250-22 PRO-250N-22 PRO-250C-22	PRO-350-22 PRO-350N-22 PRO-350C-22	Stainless Steel Nitride Hardened Stainless Steel Stainless steel with Tungsten Carbide insert

For AG-361E automatic spray gun needles see page 62

Air Consumption Graph

(measured using PRO Lite E gun with 2.2mm fluid nozzle)

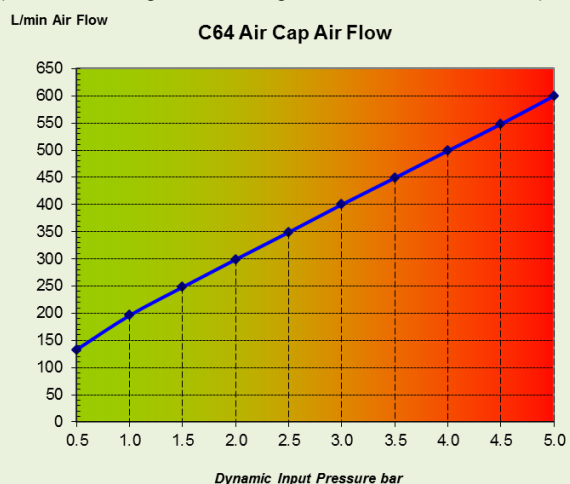

Spray Pattern



Pattern Shape:
Elliptical

Design Target Distance:
305mm (12")

Approximate Max Fan Size:
430mm long x 140mm wide @
1800 ml/min using 1.7kg/Ltr
Glaze @ 305mm (12") Target
Distance

450mm long x 150mm wide @
2400 ml/min using 1.7kg/Ltr
Glaze @ 305mm (12") Target
Distance

Typical Applications:

Ceramic, Vitreous Enamel, Adhesive, Release Agent, Wax

Typical Fluid Flow Specification:

Medium to Large scale application Air Cap.
1000-2500 ml/min

Viscosity Range Sprayed:

1.5 – 1.8 kg/Lt

Fluid Supply: Pressure Feed

Original design specification:

Ceramic & Vitreous Enamel, Sanitaryware
3.0 – 6.0 bar nominal air inlet pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap

Part Number: PROC-120-C64 Air Cap and retaining ring

Notes:

C67

CONVENTIONAL

CONVENTIONAL



#C67 Air Cap:

Type:
Conventional
External Mix


Used on Gun Type: AG-361E Pressure Feed Automatic Spray Gun and PRO Lite E Ceramic Hand Gun

Used over Fluid Nozzles:	PRO Lite E Fluid Needle	Construction
PRO-250-18 PRO-250N-18 PRO-250C-18	PRO-350-18 PRO-350N-18 PRO-350C-18	Stainless Steel Nitride Hardened Stainless Steel Stainless Steel with Tungsten Carbide insert
PRO-250-14 PRO-250N-14	PRO-350-14 PRO-350N-14	Stainless Steel Nitride Hardened Stainless Steel

For AG-361E automatic spray gun needles see page 62

Air Consumption Graph

(measured using PRO Lite gun with 1.8mm fluid nozzle)

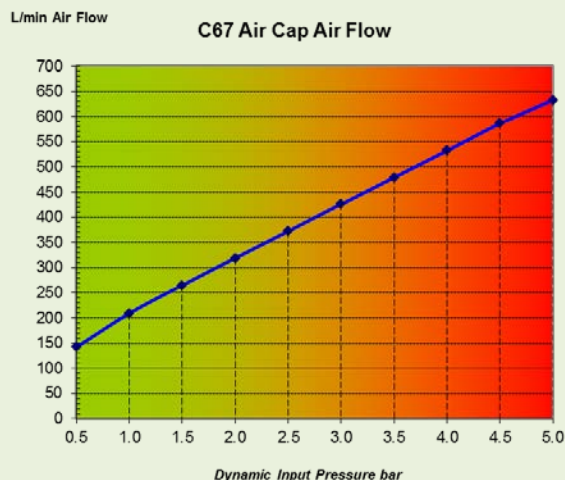

Spray Pattern



Pattern Shape:
Long Ellipse

Design Target Distance:
305mm (12")

Approximate Max Fan Size:
500mm long x 120mm wide @
900 ml/min using 1.7kg/Ltr
Glaze @ 305mm (12") Target
Distance

500mm long x 120mm wide @
1300 ml/min using 1.7kg/Ltr
Glaze @ 305mm (12") Target
Distance

Typical Applications:

Ceramic, Vitreous Enamel, Adhesive, Release Agent, Wax

Typical Fluid Flow Specification:

Medium to Large scale application Air Cap.
900-1500 ml/min

Viscosity Range Sprayed:

1.5 – 1.7 kg/Lt

Material Supply:

Pressure Feed

Original design specification:

Ceramic & Vitreous Enamel, Sanitaryware
3.0 – 6.0 bar nominal air inlet pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap

Part Number: PROC-120-C67 Air Cap and retaining ring

Notes:

E22

CONVENTIONAL




#E22 Air Cap:

Type:

Conventional
External Mix

Air Consumption Graph

(measured using Scorpion gun with 1.6mm fluid Tip)

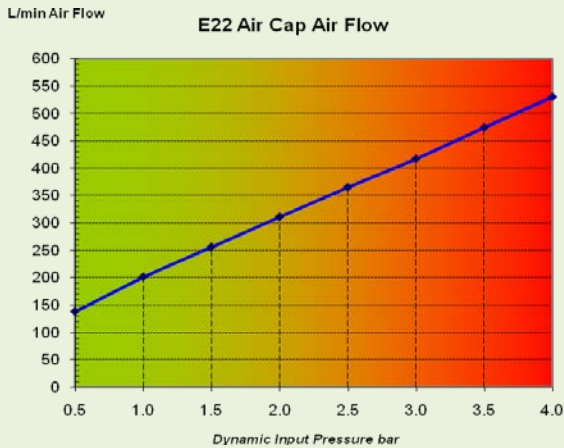

Typical Applications:

Ceramic, Vitreous Enamel, solvent free coatings, lubricants and release agents

Original design specification:

Ceramic & Vitreous Enamel, Tiles and Tableware

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring, Viton fluid seal.

Part Number: SPA-100-E22 (Air Cap only)

Notes:

Used on Gun Type:

Scorpion Needle-less Automatic Gun
GUN NOW DISCONTINUED MODEL

Used over Fluid Tips:

SPA-255-14
SPA-255-16
SPA-255-18

Hole Size:

1.4mm
1.6mm
1.8mm

Construction Material

Nickel Plated Hard Stainless
Nickel Plated Hard Stainless
Nickel Plated Hard Stainless

Fluid Needle

Not Required
Not Required
Not Required

CONVENTIONAL

Spray Pattern



Pattern Shape:

Straight Side/Round End

Design Target Distance:
305mm (12")

Approximate Fan Size:

270mm long x 40mm wide @
220 ml/min using 1.6 kg/Lt
Ceramic Glaze @ 200mm (8")
Target Distance

410mm long x 60mm wide @
220 ml/min using 1.6 kg/Lt
Ceramic Glaze @ 305mm
(12") Target Distance

Typical Fluid Flow Specification:

Medium scale application Air Cap.
50-300 ml/min

Viscosity Range Sprayed:

1.5 – 2.0 kg/L glaze

Material Supply: Pressure Feed

E31

TRANS-TECH



#E31 Air Cap:

Type: Trans-Tech
External Mix


Used on Viper Automatic Gun
Gun Type:

Hole Size:	Fluid Tip:	Tip Notes:	Fluid Needle Used:	Needle Notes:
1.2mm	SPA-250H-12	SS Profile	SPA-350-DE	PU Profile
1.2mm	SPA-250-12	Hard SS Profile	SPA-351-DEH	SS Profile
1.4mm	SPA-250H-14	SS Profile	SPA-351-DE	Hard SS Profile
1.4mm	SPA-250-14	Hard SS Profile	*See note below	
1.6mm	SPA-250H-16	SS Profile		
1.6mm	SPA-250-16	Hard SS Profile		
1.8mm	SPA-250H-18	SS Profile		
1.8mm	SPA-250-18	Hard SS Profile		
2.0mm	SPA-250H-20	SS Profile		
2.0mm	SPA-250-20	Hard SS Profile		

TRANS-TECH

Air Consumption Graph

(measured using Viper gun with 1.4mm fluid Tip)

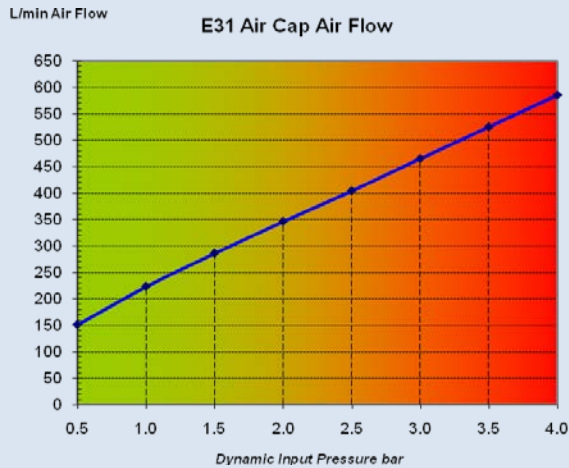

Spray Pattern



Pattern Shape:

Straight Side/Round End

Design Target Distance:

305mm (12")

Approximate Fan Size:

265mm long x 45mm wide @
160 ml/min using 1.6 kg/Lt
Ceramic Glaze @ 200mm (8")
Target Distance

400mm long x 70mm wide @
160 ml/min using 1.6 kg/Lt
Ceramic Glaze @ 305mm
(12") Target Distance

Typical Applications:

Ceramic, Vitreous Enamel, solvent free coatings, lubricants and release agents

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
100 – 300 ml/min

Viscosity Range Sprayed:

1.5 – 2.0 kg/L glaze

Material Supply: Pressure Feed

Original design specification:

Ceramic & Vitreous Enamel, Tableware and Giftware

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring, Polyurethane seal.

Part Number: SPA-100-E31 (Air Cap only).

Notes:

*The DE Needle Profile is suitable for all Tip diameters shown

E63

CONVENTIONAL



#E63 Air Cap:

Type:
Conventional
External Mix


Used on Gun Type: Viper Automatic Gun

Hole Size:	Fluid Tip:	Tip Notes:	Fluid Needle Used:	Needle Notes:
1.8mm	SPA-250H-18	SS Profile	SPA-350-DE	PU Profile
1.8mm	SPA-250-18	Hard SS Profile	SPA-351-DEH	SS Profile
			SPA-351-DE	Hard SS Profile
2.0mm	SPA-250H-20	SS Profile	SPA-350-DE	PU Profile
2.0mm	SPA-250-20	Hard SS Profile	SPA-351-DEH	SS Profile
			SPA-351-DE	Hard SS Profile

CONVENTIONAL

Air Consumption Graph

(measured using Viper Gun and 1.8mm fluid Tip)

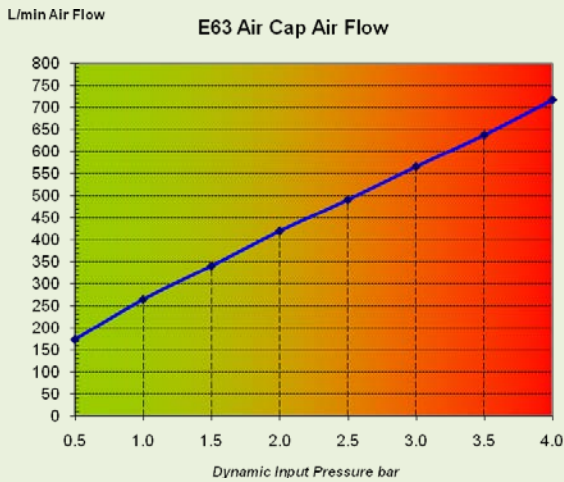

Spray Pattern



Pattern Shape:
Straight Side/Round End

Design Target Distance:
305mm (12")

Approximate Fan Size:
240mm long x 40mm wide @
1000 ml/min using 2.0 kg/Lt
Ceramic Glaze @ 200mm (8")
Target Distance

360mm long x 70mm wide @
1000 ml/min using 2.0 kg/Lt
Ceramic Glaze @ 305mm
(12") Target Distance

Typical Applications:

Ceramic, Vitreous Enamel, solvent free coatings, lubricants and release agents

Typical Fluid Flow Specification:

Medium scale application Air Cap.
300 – 900 ml/min

Viscosity Range Sprayed:

1.5 – 2.0 Kg/L

Material Supply: Pressure Feed

Original design specification:

Ceramic & Vitreous Enamel, Tableware

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring, Polyurethane Seal

Part Numbers: SPA-100-E63 (Air Cap only).

Notes:

E70

CONVENTIONAL

CONVENTIONAL



#E70 Air Cap:

Type:


Conventional
External Mix

Used on Viper Automatic Gun
Gun Type:

Hole Size:	Fluid Tip:	Tip Notes:	Fluid Needle Used:	Needle Notes:
2.2mm 2.2mm	SPA-250-22 SPA-254-22	Hard SS Profile Carbide Profile	SPA-351-22 SPA-352-K	Hard SS Profile Carbide Profile
2.8mm 2.8mm	SPA-250-28B SPA-254-28	Hard SS Profile Carbide Profile	SPA-351-28B SPA-352-K	Hard SS Profile Carbide Profile

Air Consumption Graph

(measured using Viper gun with 2.8mm fluid Tip)

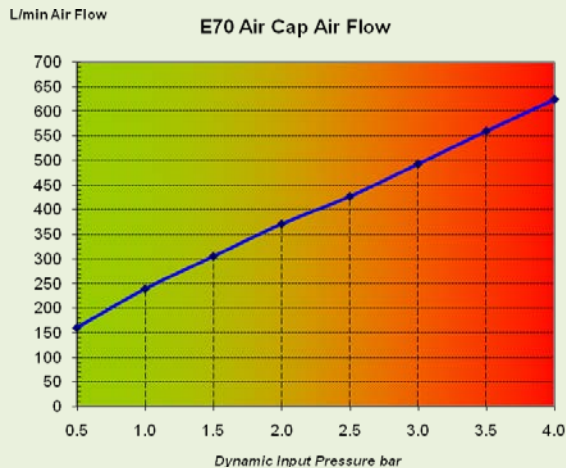

Spray Pattern



Pattern Shape:

Straight Side/Round End

Design Target Distance:
305mm (12")

Approximate Fan Size:

400mm long x 70mm wide @
1500 ml/min using 2.0 kg/Lt
Ceramic Glaze @ 200mm (8")
Target Distance

600mm long x 105mm wide @
1500 ml/min using 2.0 kg/Lt
Ceramic Glaze @ 305mm
(12") Target Distance

Typical Applications:

Ceramic, Vitreous Enamel, solvent free coatings, lubricants and release agents

Typical Fluid Flow Specification:

Medium to large scale application Air Cap.
500 – 1800 ml/min
Viscosity Range Sprayed:
1.5 – 2.0 Kg/Lt
Material Supply: Pressure Feed

Original design specification:

Ceramic & Vitreous Enamel, Sanitaryware

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring, Polyurethane seal.

Part Numbers: SPA-100-E70 (Air Cap only)

Notes:

H1

HVLP

HVLP



#H1 Air Cap


Type :
High Volume Low Pressure.
External Mix

Used on Gun Type: GTI-HD Suction, Gravity & Pressure Hand Guns

Used over Fluid Tips:	GTI-HD Suction Fluid Needle	GTI-HD Gravity Fluid Needle	GTI-HD Pressure Fluid Needle
PRO-205-085*	Not Available	Not Available	PRO-305-085-10
PRO-205-10*	Not Available	Not Available	PRO-305-085-10
PRO-205-12*	Not Available	Not Available	PRO-305-12-14
PRO-205-14*	Not Available	Not Available	PRO-305-12-14
PRO-200-12	Not Available	PRO-300	Not Available
PRO-200-13	Not Available	PRO-300	Not Available
PRO-200-14	Not Available	PRO-300	Not Available
PRO-200-16	PRO-315	Not Available	PRO-315
PRO-200-18	PRO-315	Not Available	PRO-315
PRO-200-20	PRO-315	Not Available	PRO-315

Air Consumption Graph

(Measured using GTI-HD-G with 1.3mm Fluid Tip)

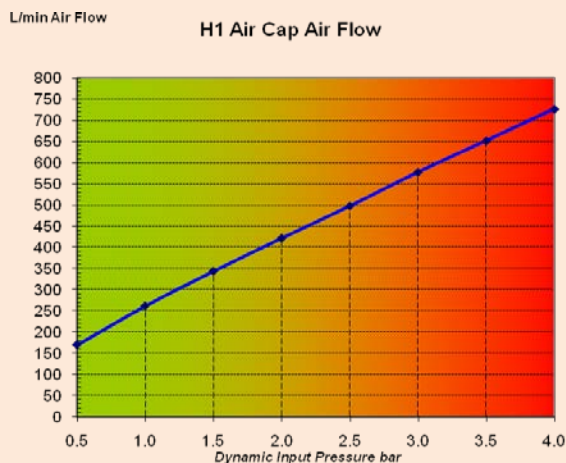

Spray Pattern



Pattern Shape:

Long Ellipse

Design Target Distance:

200mm (8")

Approximate Fan Size:

315mm long x 70mm wide
@ 200 ml/min 25 sec Din 4

Typical Applications:

Wood, General Industrial, Metal, Plastic, Aerospace, Leather, Military, Decorative, Construction, Light Marine

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.

160 – 200 ml/min

Viscosity Range Sprayed:

15 to 25 sec Din 4

Fluid Supply: Suction, Gravity & Pressure Feed

Original design specification:

Solventbased & Waterbased coatings. Long Elliptical pattern, Small to medium production. 2bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring

Part Number: PRO-100-H1-K (Cap & Retaining Ring).

Notes:

*Internal profile originally designed for Pressure Feed Applications

HS1

HVLP

HVLP



#HS1 Air Cap:

Type:
High Volume Low Pressure
External Mix


Used on Gun SRI-HD Gravity Hand Gun
Type:

Used over Fluid SRI-HD Fluid Needle
Tips:


SRIPRO-200-08-K	SRIPRO-300-08-10-K
SRIPRO-200-10-K	SRIPRO-300-08-10-K
SRIPRO-200-12-K	SRIPRO-300-12-14-K
SRIPRO-200-14-K	SRIPRO-300-12-14-K

Air Consumption Graph

(measured using SRI-HD gun with 1.4mm fluid Tip)

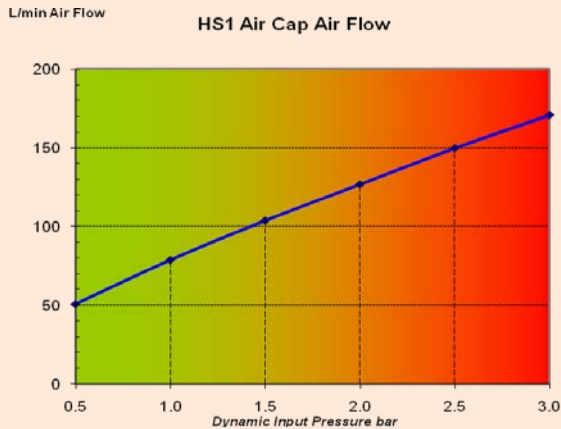

Spray Pattern

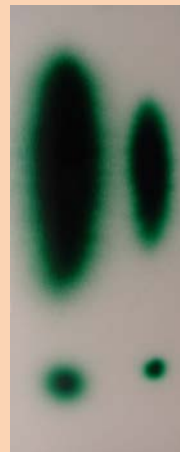

Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
210mm long x 50mm wide @
95 ml/min using 20 sec Din 4
@ 200mm (8") Target Distance

115mm long x 25mm wide @
95 ml/min using 20 sec Din 4
@ 100mm (4") Target Distance

Typical Applications:

Wood, General Industrial, Metal, Lubricants,
Adhesive, Plastic, Aerospace, Leather, Military,
Decorative, Construction, Light Marine

Typical Fluid Flow Specification:

Small scale application Air Cap.
0-190 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Material Supply: Gravity Feed

Original design specification:

Small components, repair & highlighting
2.0 bar (=0.7 bar/10psi) nominal handle inlet pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring,

Part Number: SRIPRO-100-HS1-K Air Cap and Retaining Ring

Notes:

HV30

HVLP



#HV30 Air Cap

Type :
High Volume Low Pressure.
External Mix

Used on Gun Type: GTI Pro Lite Suction, Gravity & Pressure Hand Guns, AG361 & AG362 Automatic guns


Used over Fluid Tips:	GTI Pro Lite Suction Fluid Needle	GTI Pro Lite Gravity Fluid Needle	GTI Pro Lite Pressure Fluid Needle
PRO-205-085*	Not Available	Not Available	PRO-320-085-10
PRO-205-10*	Not Available	Not Available	PRO-320-085-10
PRO-205-12*	Not Available	Not Available	PRO-320-12-14
PRO-205-14*	Not Available	Not Available	PRO-320-12-14
PRO-205-16*	Not Available	Not Available	PRO-320-16-18
PRO-205-18*	Not Available	Not Available	PRO-320-16-18
PRO-205-20*	Not Available	Not Available	PRO-320-20-22
PRO-205-22*	Not Available	Not Available	PRO-320-20-22
PRO-200-12	Not Available	PRO-301	Not Available
PRO-200-13	Not Available	PRO-301	Not Available
PRO-200-14	Not Available	PRO-301	Not Available
PRO-200-16	PRO-325	PRO-303	Not Available
PRO-200-18	PRO-325	PRO-303	Not Available
PRO-200-20	PRO-325	PRO-303	Not Available

HVLP

For AG-360 series automatic spray gun needles see page 62

Air Consumption Graph

(Measured using GTI Lite G with 1.3mm Fluid Tip)

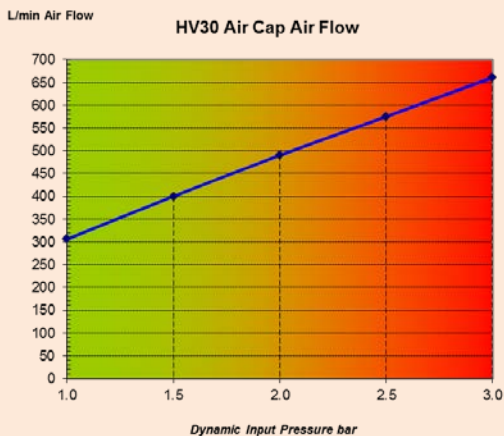

Spray Pattern



Pattern Shape:

Long Ellipse

Design Target Distance:

200mm (8")

Approximate Fan Size:

315mm long x 70mm wide @ 200 ml/min 25 sec Din 4

Typical Applications:

Wood, General Industrial, Metal, Plastic, Aerospace, Leather, Military, Decorative, Construction, Light Marine

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.

160 – 200 ml/min

Viscosity Range Sprayed:

15 to 25 sec Din 4

Fluid Supply: Suction, Gravity & Pressure Feed

Original design specification:

Solventbased & Waterbased coatings. Long Elliptical pattern, Small to medium production. 2bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Aluminium Retaining Ring

Part Number: PRO-102-HV30-K (Cap & Retaining Ring).

Notes:

*Internal profile originally designed for Pressure Feed Applications

P1

TRANS-TECH

TRANS-TECH



#P1 Air Cap:

Type:
Compliant/Trans-Tech
External Mix

Used on Gun PRI-HD Gravity Hand Gun
Type:


Used over Fluid Tips:

PRI-HD Fluid Needle

PRIPRO-210-14	PRIPRO-310-K
PRIPRO-210-16	PRIPRO-310-K
PRIPRO-210-18	PRIPRO-310-K
PRIPRO-210-20	PRIPRO-310-K
PRIPRO-210-25	PRIPRO-310-K

Air Consumption Graph

(measured using PRI-HD gun with 1.8mm fluid Tip)

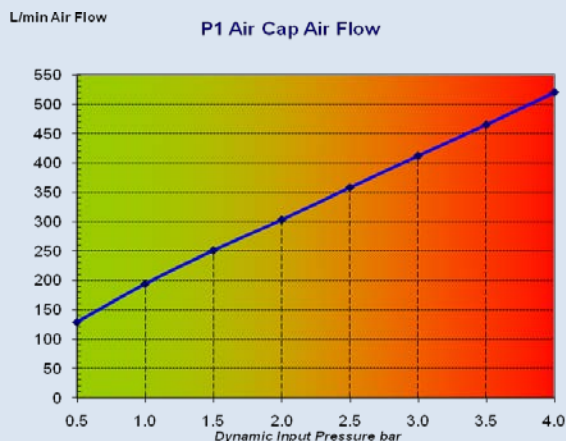

Spray Pattern



Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
270mm long x 60mm wide @
185 cc/min using 25 sec Din 4
@ 200mm (8") Target
Distance

Typical Applications:

Wood, General Industrial, Metal, Ceramic, Vitreous Enamel, Lubricants, Adhesive, Plastic, Aerospace, Military, Decorative, Construction, Light Marine, Release Agent

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
100-350 ml/min

Viscosity Range Sprayed:

20 to 40 sec Din4

Material Supply:

Gravity Feed

Original design specification:

Heavy bodied coatings & primers
2.0 to 3.0 bar nominal handle inlet pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring,

Part Number: PRIPRO-100-P1-K Air Cap and Retaining Ring

Notes:

R40

TRANS-TECH

TRANS-TECH



#TE40 Air Cap:

Type:
Trans-Tech Compliant
External Mix

Used on Gun Type: GTI Pro Lite Pressure Hand Gun, AG361 & AG362 Automatic guns

Used over Fluid Tips: **GTI Pro Lite Pressure Fluid Needle**


PRO-205-085*	PRO-320-085-10
PRO-205-10*	PRO-320-085-10
PRO-205N-10*	PRO-320N-085-10
PRO-205-12*	PRO-320-12-14
PRO-205-14*	PRO-320-12-14
PRO-205N-14*	PRO-320N-12-14
PRO-205-16*	PRO-320-16-18
PRO-205-18*	PRO-320-16-18
PRO-205N-18*	PRO-320N-15-18
PRO-205-20*	PRO-320-20-22
PRO-205-22*	PRO-320-20-22
PRO-205N-22*	PRO-320N-20-22

For AG-360 series automatic spray gun needles see page 62


Air Consumption Graph

(measured using GTi PRO Lite P gun with 1.4mm fluid nozzle)

TE40R Air Cap

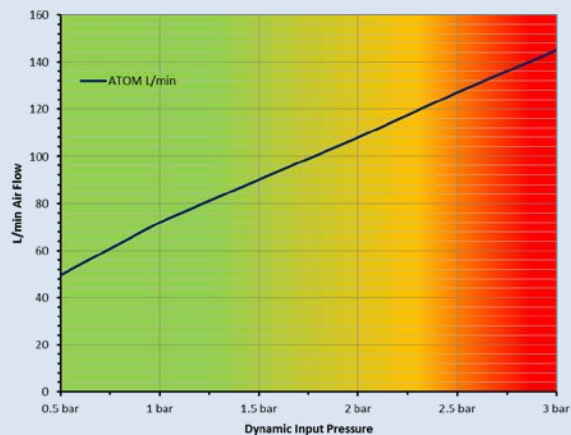

Spray Pattern

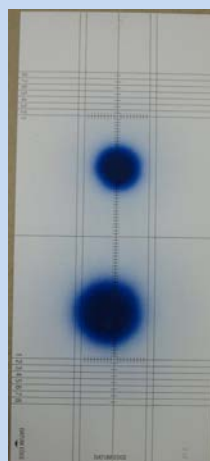

Pattern Shape:
Round

Design Target Distance:
200mm (8")

Approximate Max Fan Size:
70mm dia @ 240 ml/min using 30 sec Din 4 @ 200mm (8") target distance

95mm dia @ 240 ml/min using 30 sec Din 4 @ 300mm (10") target distance

Typical Applications:

Wood, General Industrial, Metal, Ceramic, Vitreous Enamel, Lubricants, Adhesive, Aerospace, Release Agent,

Typical Fluid Flow Specification:

Small scale application Air Cap.
100 – 250 ml/min

Viscosity Range Sprayed:

15 to 45 sec Din 4

Fluid Supply: Pressure Feed

Original design specification:

Solventbased anti-corrosion coatings. Small to medium production. 2 to 4 bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap
Anodized Aluminium Retaining Ring

Part Number: PRO-102-R40 Air Cap and retaining ring

Notes:

RS1

HVLP

HVLP



#RS1 Air Cap:

Type:

High Volume Low Pressure
External Mix


Used on Gun SRI-HD Gravity Hand Gun
Type:

Used over Fluid SRI-HD Fluid Needle
Tips:

SRIPRO-200-08-K	SRIPRO-300-08-10-K
SRIPRO-200-10-K	SRIPRO-300-08-10-K
SRIPRO-200-12-K	SRIPRO-300-12-14-K
SRIPRO-200-14-K	SRIPRO-300-12-14-K

Air Consumption Graph


(measured using SRI-HD gun with 1.4mm fluid Tip)

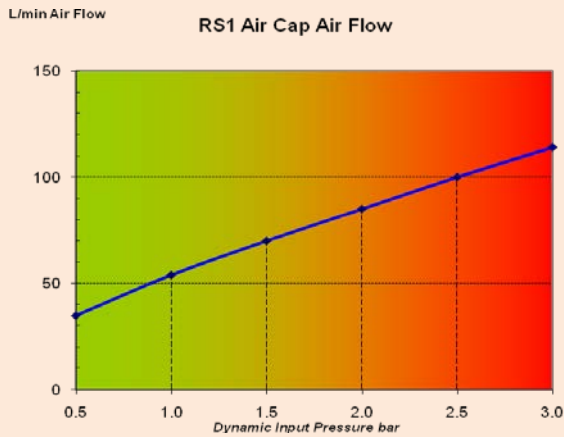

Typical Applications:

Wood, General Industrial, Metal, Lubricants,
Adhesive, Plastic, Aerospace, Leather, Military,
Decorative, Construction, Light Marine

Spray Pattern

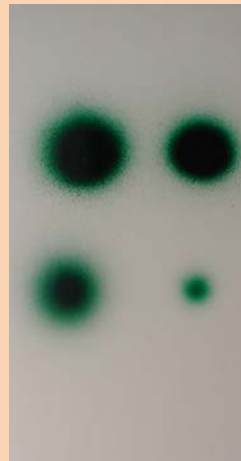

Pattern Shape:
Round

Design Target Distance:
200mm (8")

Approximate Fan Size:
40mm diameter @ 70 ml/min
using 20 sec Din 4 @ 200mm
(8") Target Distance

30mm diameter @ 70 ml/min
using 20 sec Din 4 @ 100mm
(4") Target Distance

Typical Fluid Flow Specification:

Very small scale application Air Cap.
0-100 ml/min

Viscosity Range Sprayed:
15 to 25 sec Din 4

Material Supply: Gravity Feed

Original design specification:

Very precise touch-up & repair
1.0 to 2.0 bar bar dynamic inlet pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap

Part Number: SRIPRO-100-RS1-K Air Cap & retaining ring

Notes:

T1

TRANS-TECH



#T1 Air Cap:

Type:

Trans-Tech Compliant External Mix


Used on Gun Type: GTI-HD Suction, Gravity & Pressure Hand Guns

Used over Fluid Tips:	GTI-HD Suction Fluid Needle	GTI-HD Gravity Fluid Needle	GTI-HD Pressure Fluid Needle
PRO-205-085*	Not Available	Not Available	PRO-305-085-10
PRO-205-10*	Not Available	Not Available	PRO-305-085-10
PRO-205-12*	Not Available	Not Available	PRO-305-12-14
PRO-205-14*	Not Available	Not Available	PRO-305-12-14
PRO-200-12	Not Available	PRO-300	Not Available
PRO-200-13	Not Available	PRO-300	Not Available
PRO-200-14	Not Available	PRO-300	Not Available
PRO-200-16	PRO-315	Not Available	PRO-315
PRO-200-18	PRO-315	Not Available	PRO-315
PRO-200-20	PRO-315	Not Available	PRO-315

TRANS-TECH

Air Consumption Graph

(measured using GTI-HD-G gun with 1.3mm fluid Tip)

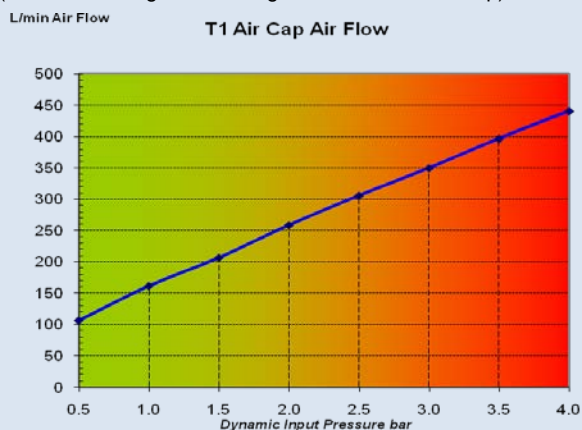

Spray Pattern



Pattern Shape:

Long Ellipse

Design Target Distance:

200mm (8")

Approximate Fan Size:

300mm long x 70mm wide @ 200cc/min 25sec Din 4

Typical Applications:

Wood, General Industrial, Metal, Plastic, Aerospace, Leather, Military, Decorative, Construction, Light Marine

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap. 150 – 200 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Fluid Supply:

Suction, Gravity & Pressure Feed Solventbased & Waterbased coatings. Long Elliptical pattern, Small to medium production 2bar dynamic inlet Pressure

Original design specification:

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring

Part Number: PRO-100-T1-K (Cap & Retaining Ring).

Notes:

*Internal profile originally designed for Pressure Feed Applications

T2

TRANS-TECH



#T2 Air Cap:
Type:
 Trans-Tech Compliant
 External Mix


Used on Gun GTI-HD Suction, Gravity & Pressure Hand Guns
Type:

Used over Fluid Tips:	GTI-HD Suction Fluid Needle	GTI-HD Gravity Fluid Needle	GTI-HD Pressure Fluid Needle
PRO-205-085*	Not Available	Not Available	PRO-305-085-10
PRO-205-10*	Not Available	Not Available	PRO-305-085-10
PRO-205-12*	Not Available	Not Available	PRO-305-12-14
PRO-205-14*	Not Available	Not Available	PRO-305-12-14
PRO-200-12	Not Available	PRO-300	Not Available
PRO-200-13	Not Available	PRO-300	Not Available
PRO-200-14	Not Available	PRO-300	Not Available
PRO-200-16	PRO-315	Not Available	PRO-315
PRO-200-18	PRO-315	Not Available	PRO-315
PRO-200-20	PRO-315	Not Available	PRO-315

TRANS-TECH

Air Consumption Graph

(measured using GTI-HD-G gun with 1.3mm fluid Tip)

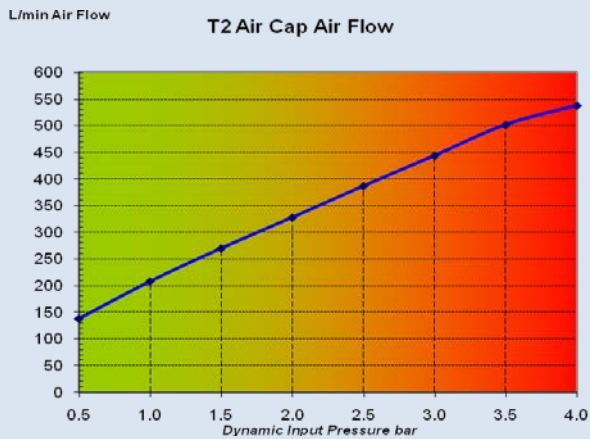

Spray Pattern



Pattern Shape:
 Long Ellipse

Design Target Distance:
 200mm (8")

Approximate Fan Size:
 290mm long x 60mm wide
 @ 200 ml/min 25 sec Din 4

Typical Applications:

Wood, General Industrial, Metal, Plastic, Aerospace, Leather, Military, Decorative, Construction, Light Marine

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
 150 – 200 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Fluid Supply: Suction, Gravity & Pressure Feed

Original design specification:

Solventbased & Waterbased coatings. Long Elliptical pattern, Small to medium production 2bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring

Part Number: PRO-100-T2-K (Cap & Retaining Ring).

Notes:

*Internal profile originally designed for Pressure Feed Applications

T3

TRANS-TECH

TRANS-TECH



#T3 Air Cap:

Type:

Trans-Tech Compliant
External Mix

**Used on
Gun Type:**

GTI-HD Pressure Hand Guns

**Used over
Fluid Tips:**


**GTI-HD
Pressure
Fluid Needle**

PRO-205-085
PRO-205-10
PRO-205-12
PRO-205-14
PRO-200-16*
PRO-200-18*
PRO-200-20*

PRO-305-085-10
PRO-305-085-10
PRO-305-12-14
PRO-305-12-14
PRO-315
PRO-315
PRO-315

Air Consumption Graph

(measured using GTI-HD-P gun with 1.4mm fluid Tip)

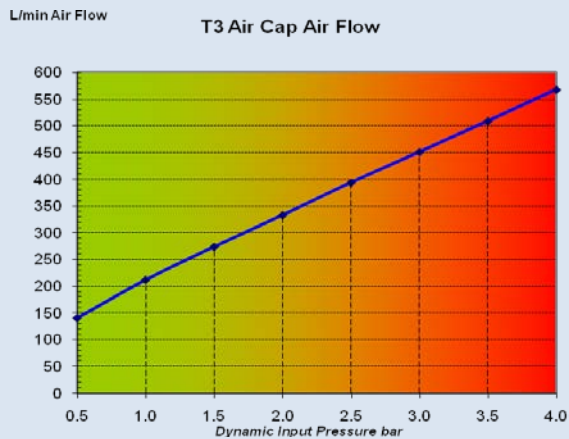

Spray Pattern



Pattern Shape:
Short Ellipse

**Design Target
Distance:**
200mm (8")

Approximate Fan Size:
300mm long x 80mm
wide @ 280 ml/min 20
sec Din 4

Typical Applications:

Wood, General Industrial, Metal, Ceramic,
Vitreous Enamel, Lubricants, Adhesive, Plastic,
Aerospace, Military, Decorative, Construction,
Light Marine, Release Agent

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.

200 – 300 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Fluid Supply: Pressure Feed

**Original design
specification:**

Solventbased & Waterbased coatings. Long Elliptical pattern,
Small to medium production 2 to 3 bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring

Part Number: PRO-100-T3-K (Cap & Retaining Ring).

Notes:

*Internal profile originally designed for Suction/Gravity Feed Applications

T4

TRANS-TECH

TRANS-TECH



#T4 Air Cap:

Type:

Trans-Tech Compliant External Mix

Used on Gun Type:

GTI-HD Pressure Hand Guns

Used over Fluid Tips:


GTI-HD Pressure Fluid Needle

PRO-205-085
PRO-205-10
PRO-205-12
PRO-205-14
PRO-200-16*
PRO-200-18*
PRO-200-20*

PRO-305-085-10
PRO-305-085-10
PRO-305-12-14
PRO-305-12-14
PRO-315
PRO-315
PRO-315

Air Consumption Graph

(measured using GTI-HD-P gun with 1.4mm fluid Tip)

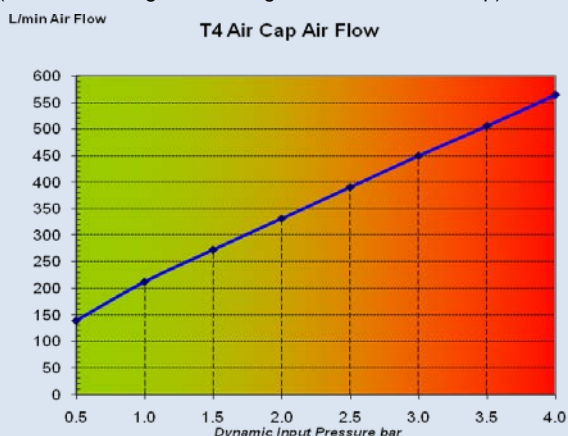

Spray Pattern



Pattern Shape:

Straight sides/tapered ends

Design Target Distance:

250mm (10")

Approximate Fan Size:

380mm long x 80mm wide @ 320 ml/min 20 sec Din 4

Typical Applications:

Wood, General Industrial, Metal, Ceramic, Vitreous Enamel, Lubricants, Adhesive, Plastic, Aerospace, Military, Decorative, Construction, Light Marine, Release Agent,

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap. 250 – 400 ml/min

Viscosity Range Sprayed:

15 to 35 sec Din 4

Fluid Supply: Pressure Feed

Original design specification:

Solventbased & Waterbased coatings. Small to medium production. 2 to 4 bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring

Part Number: PRO-100-T4-K (Cap & Retaining Ring).

Notes:

*Internal profile originally designed for Suction/Gravity Feed Applications

TE10

TRANS-TECH

TRANS-TECH



#TE10 Air Cap:
Type:
 Trans-Tech Compliant
 External Mix


Used on Gun Type: GTI Pro Lite Suction, Gravity & Pressure Hand Guns, AG361 and AG362 Automatic guns

Used over Fluid Tips:	GTI Pro Lite Suction Fluid Needle	GTI Pro Lite Gravity Fluid Needle	GTI Pro Lite Pressure Fluid Needle
PRO-205-085*	Not Available	Not Available	PRO-320-085-10
PRO-205-10*	Not Available	Not Available	PRO-320-085-10
PRO-205-12*	Not Available	Not Available	PRO-320-12-14
PRO-205-14*	Not Available	Not Available	PRO-320-12-14
PRO-205-16*	Not Available	Not Available	PRO-320-16-18
PRO-205-18*	Not Available	Not Available	PRO-320-16-18
PRO-205-20*	Not Available	Not Available	PRO-320-20-22
PRO-205-22*	Not Available	Not Available	PRO-320-20-22
PRO-200-12	Not Available	PRO-301	Not Available
PRO-200-13	Not Available	PRO-301	Not Available
PRO-200-14	Not Available	PRO-301	Not Available
PRO-200-16	PRO-325	PRO-303	Not Available
PRO-200-18	PRO-325	PRO-303	Not Available
PRO-200-20	PRO-325	PRO-303	Not Available


For AG-360 series automatic spray gun needles see page 62

Air Consumption Graph

(measured using GTI Lite G gun with 1.4mm fluid Tip)

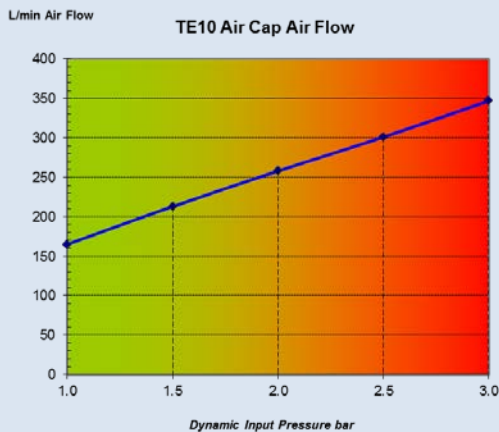

Spray Pattern

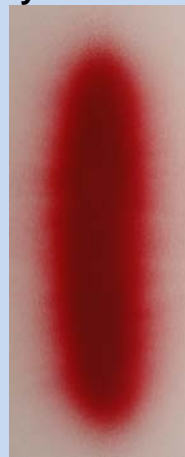

Pattern Shape:
 Long Ellipse

Design Target Distance:
 200mm (8")

Approximate Fan Size:

300mm long x 70mm wide @ 200cc/min 25sec Din 4

Typical Applications:

Wood, General Industrial, Metal, Plastic, Aerospace, Leather, Military, Decorative, Construction, Light Marine

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
 150 – 200 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Fluid Supply: Suction, Gravity & Pressure Feed

Original design specification:

Solventbased & Waterbased coatings. Long Elliptical pattern, Small to medium production 2bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring

Part Number: PRO-100-TE10-K (Cap & Retaining Ring).

Notes: *Internal profile designed for Pressure Feed Applications

TE20

TRANS-TECH



#TE20 Air Cap:

Type:
Trans-Tech Compliant
External Mix

Used on Gun GTI Pro Lite Suction, Gravity & Pressure Hand Guns, AG361 & AG362 Automatic Guns


Used over Fluid Tips:	GTI Pro Lite Suction Fluid Needle	GTI Pro Lite Gravity Fluid Needle	GTI Pro Lite Pressure Fluid Needle
PRO-205-085*	Not Available	Not Available	PRO-320-085-10
PRO-205-10*	Not Available	Not Available	PRO-320-085-10
PRO-205-12*	Not Available	Not Available	PRO-320-12-14
PRO-205-14*	Not Available	Not Available	PRO-320-12-14
PRO-205-16*	Not Available	Not Available	PRO-320-16-18
PRO-205-18*	Not Available	Not Available	PRO-320-16-18
PRO-205-20*	Not Available	Not Available	PRO-320-20-22
PRO-205-22*	Not Available	Not Available	PRO-320-20-22
PRO-200-12	Not Available	PRO-301	Not Available
PRO-200-13	Not Available	PRO-301	Not Available
PRO-200-14	Not Available	PRO-301	Not Available
PRO-200-16	PRO-325	PRO-303	Not Available
PRO-200-18	PRO-325	PRO-303	Not Available
PRO-200-20	PRO-325	PRO-303	Not Available

TRANS-TECH

For AG-360 series automatic spray gun needles see page 62

Air Consumption Graph

(measured using GTI Lite G gun with 1.3mm fluid Tip)

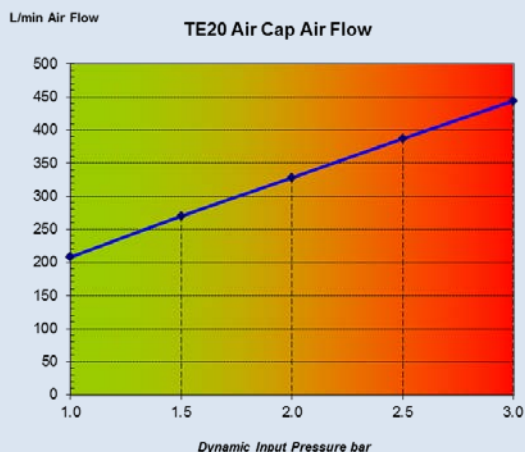

Spray Pattern



Pattern Shape:
Long Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
290mm long x 60mm wide
@ 200 ml/min 25 sec Din 4

Typical Applications:

Wood, General Industrial, Metal, Plastic, Aerospace, Leather, Military, Decorative, Construction, Light Marine

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
150 – 200 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Fluid Supply: Suction, Gravity & Pressure Feed

Original design specification:

Solventbased & Waterbased coatings. Long Elliptical pattern, Small to medium production 2bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring

Part Number: PRO-100-TE20-K (Cap & Retaining Ring).

Notes:

*Internal profile originally designed for Pressure Feed Applications

TE30

TRANS-TECH

TRANS-TECH



#TE30 Air Cap:

Type:
Trans-Tech Compliant
External Mix

Used on Gun Type: GTI Pro Lite Pressure Hand Guns
AG361 & AG362 Automatic guns


Used over Fluid Tips: **GTI Pro Lite Pressure Fluid Needle**

PRO-205-085*	PRO-320-085-10
PRO-205-10*	PRO-320-085-10
PRO-205-12*	PRO-320-12-14
PRO-205-14*	PRO-320-12-14
PRO-205-16*	PRO-320-16-18
PRO-205-18*	PRO-320-16-18
PRO-205-20*	PRO-320-20-22
PRO-205-22*	PRO-320-20-22

For AG-360 series automatic spray gun needles see page 62

Air Consumption Graph

(measured using GTI Lite P gun with 1.4mm fluid Tip)

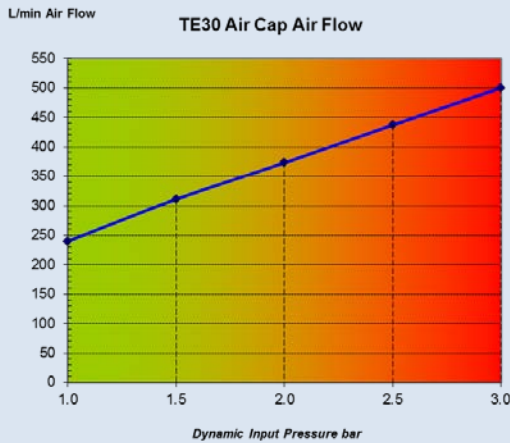

Spray Pattern



Pattern Shape:
Short Ellipse

Design Target Distance:
200mm (8")

Approximate Fan Size:
300mm long x 80mm wide @ 280 ml/min 20 sec Din 4

Typical Applications:

Wood, General Industrial, Metal, Ceramic, Vitreous Enamel, Lubricants, Adhesive, Plastic, Aerospace, Military, Decorative, Construction, Light Marine, Release Agent

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
200 – 300 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Fluid Supply: Pressure Feed

Original design specification:

Solventbased & Waterbased coatings. Medium Elliptical pattern, Small to medium production 2-3 bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring

Part Number: PRO-100-TE30-K (Cap & Retaining Ring).

Notes:

*Internal profile originally designed for Pressure Feed Applications

TE40

TRANS-TECH

TRANS-TECH



#TE40 Air Cap:

Type:
Trans-Tech Compliant
External Mix

Used on Gun Type: GTI Pro Lite Pressure Hand Guns
AG361 & AG362 Automatic guns


Used over Fluid Tips: **GTI Pro Lite Pressure Fluid Needle**

PRO-205-085*	PRO-320-085-10
PRO-205-10*	PRO-320-085-10
PRO-205-12*	PRO-320-12-14
PRO-205-14*	PRO-320-12-14
PRO-205-16*	PRO-320-16-18
PRO-205-18*	PRO-320-16-18
PRO-205-20*	PRO-320-20-22
PRO-205-22*	PRO-320-20-22

For AG-360 series automatic spray gun needles see page 62

Air Consumption Graph

(measured using GTI Lite P gun with 1.4mm fluid Tip)

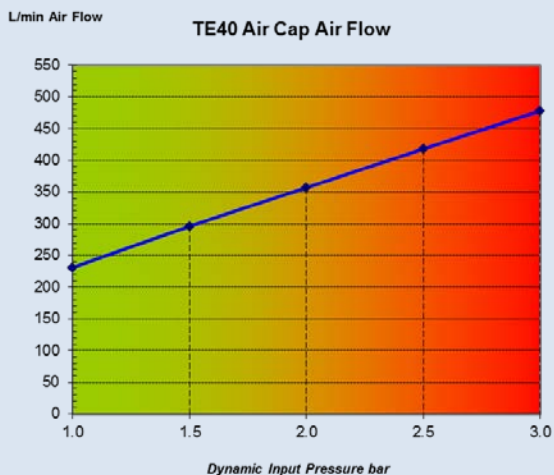

Spray Pattern



Pattern Shape:
Straight sides/tapered ends

Design Target Distance:
250mm (10")

Approximate Fan Size:
380mm long x 80mm wide @ 320 ml/min 20 sec Din 4

Typical Applications:

Wood, General Industrial, Metal, Ceramic, Vitreous Enamel, Lubricants, Adhesive, Plastic, Aerospace, Military, Decorative, Construction, Light Marine, Release Agent,

Typical Fluid Flow Specification:

Small to Medium scale application Air Cap.
250 – 400 ml/min

Viscosity Range Sprayed:

15 to 35 sec Din 4

Fluid Supply:

Pressure Feed

Original design specification:

Solventbased & Waterbased coatings. Small to medium production. 2 to 4 bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Retaining Ring

Part Number: PRO-100-TE40-K (Cap & Retaining Ring).

Notes:

*Internal profile originally designed for Pressure Feed Applications

TE50

TRANS-TECH

TRANS-TECH



#TE50 Air Cap:

Type:

Trans-Tech Compliant
External Mix

Used on Gun Type: GTI Pro Lite Pressure Hand Guns
AG361 & AG361 Automatic guns


Used over Fluid Tips: **GTI Pro Lite Pressure Fluid Needle**

PRO-205-085*	PRO-320-085-10
PRO-205-10*	PRO-320-085-10
PRO-205-12*	PRO-320-12-14
PRO-205-14*	PRO-320-12-14
PRO-205-16*	PRO-320-16-18
PRO-205-18*	PRO-320-16-18
PRO-205-20*	PRO-320-20-22
PRO-205-22*	PRO-320-20-22


For AG-360 series automatic spray gun needles see page 62

Air Consumption Graph

(measured using GTI Lite P gun with 1.4mm fluid Tip)

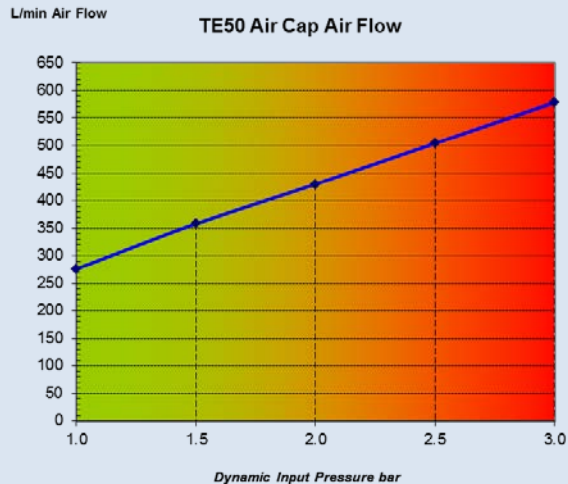

Spray Pattern

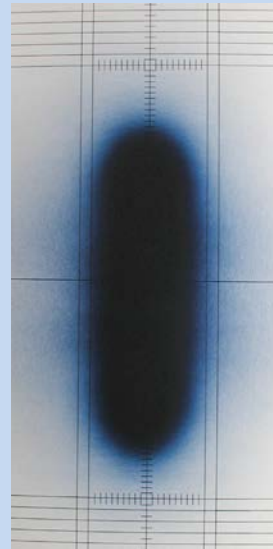

Pattern Shape:

Straight sides/tapered ends

Design Target Distance:

200mm (8")

Approximate Fan Size:

300mm long x 95mm wide @ 300 ml/min 20 sec Din 4

Typical Applications:

General Industrial, Metal, Ceramic, Vitreous Enamel, Adhesive, Plastic, Aerospace, Military, Decorative, Construction,

Typical Fluid Flow Specification:

Medium to high scale application Air Cap.
250 – 400 ml/min

Viscosity Range Sprayed:

20 to 45 sec Din 4

Fluid Supply:

Pressure Feed

Original design specification:

Solventbased & Waterbased coatings. Medium to high production. 2 to 4 bar dynamic inlet Pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap and Aluminium Retaining Ring

Part Number: PRO-102-TE50-K (Cap & Retaining Ring).

Notes:

*Internal profile originally designed for Pressure Feed Applications

AG361, AG361E & AG362 FLUID NEEDLES & TIPS

THE AG361 AND AG362 AUTOMATIC SPRAY GUNS UTILISE COMMON AIR CAPS AND FLUID TIPS. HOWEVER THE FLUID NEEDLES ARE INDIVIDUAL TO EACH SPECIFIC GUN BODY DESIGN. USE THE FOLLOWING TABLE TO DOUBLE CHECK THAT PART NUMBERS FOR THESE COMPONENTS ARE CORRECT.

Air Cap Part Number	Used over Fluid Tips:	Hole Size:	AG361 Fluid Needle	AG362 Fluid Needle		
PROC-120-C1 PROC-120-C2 PROC-120-C3	PROC-215-085 PROC-215N-085 PROC-215-10 PROC-215N-10 PROC-215-12 PROC-215N-12 PROC-215-14 PROC-215N-14 PROC-215-16 PROC-215N-16 PROC-215-18 PROC-215N-18	0.85mm 0.85mm 1.0mm 1.0mm 1.2mm 1.2mm 1.4mm 1.4mm 1.6mm 1.6mm 1.8mm 1.8mm	SPA-361-085-10 SPA-361N-085-10 SPA-361-085-10 SPA-361N-085-10 SPA-361-12-14 SPA-361N-12-14 SPA-361-12-14 SPA-361N-12-14 SPA-361-16-18 SPA-361N-16-18 SPA-361-16-18 SPA-361N-16-18	SPA-362-085-10 SPA-362N-085-10 SPA-362-085-10 SPA-362N-085-10 SPA-362-12-14 SPA-362N-12-14 SPA-362-12-14 SPA-362N-12-14 SPA-362-16-18 SPA-362N-16-18 SPA-362-16-18 SPA-362N-16-18		
PRO-100-HV30 PRO-100-TE10 PRO-100-TE20 PRO-100-TE30 PRO-100-TE40 PRO-102-TE50 PRO-102-R40	PRO-205-085 PRO-205N-085 PRO-205-10 PRO-205N-10 PRO-205-12 PRO-205N-12 PRO-205-14 PRO-205N-14 PRO-205-16 PRO-205N-16 PRO-205-18 PRO-205N-18 PRO-205-20 PRO-205N-20 PRO-205-22 PRO-205N-22	0.85mm 0.85mm 1.0mm 1.0mm 1.2mm 1.2mm 1.4mm 1.4mm 1.6mm 1.6mm 1.8mm 1.8mm 2.0mm 2.0mm 2.2mm 2.2mm	SPA-361-085-10 SPA-361N-085-10 SPA-361-085-10 SPA-361N-085-10 SPA-361-12-14 SPA-361N-12-14 SPA-361-12-14 SPA-361N-12-14 SPA-361-16-18 SPA-361N-16-18 SPA-361-16-18 SPA-361N-16-18 SPA-361-20-22 SPA-361N-20-22 SPA-361-20-22 SPA-361N-20-22	SPA-362-085-10 SPA-362N-085-10 SPA-362-085-10 SPA-362N-085-10 SPA-362-12-14 SPA-362N-12-14 SPA-362-12-14 SPA-362N-12-14 SPA-362-16-18 SPA-362N-16-18 SPA-362-16-18 SPA-362N-16-18 SPA-362-20-22 SPA-362N-20-22 SPA-362-20-22 SPA-362N-20-22		
PROC-120-C62	PRO-250-28 PRO-250N-28 PRO-250C-28	2.8mm 2.8mm 2.8mm	SPA-360-28 SPA-360N-28 SPA-360C-28	Not Available Not Available Not Available		
PROC-120-C64	PRO-250-22 PRO-250N-22 PRO-250C-22	2.2mm 2.2mm 2.2mm	SPA-360-22-18 SPA-360N-22-18 SPA-360C-22-18	Not Available Not Available Not Available		
PROC-120-C67	PRO-250-18 PRO-250N-18 PRO-250C-18 PRO-250-14 PRO-250N-14	1.8mm 1.8mm 1.8mm 1.4mm 1.4mm	SPA-360-22-18 SPA-360N-22-18 SPA-360C-22-18 SPA-360-22-18 SPA-360N-22-18	Not Available Not Available Not Available Not Available Not Available		

Notes:

S designation denotes High Grade Stainless Steel

N designation denotes Nitride hardened

C designation denotes Tungsten carbide (Carballoy)

TS1

TRANS-TECH

TRANS-TECH



#TS1 Air Cap:

Type:

Compliant/Trans-Tech
External Mix

Used on Gun SRI-HD Gravity Hand Gun
Type:

Used over Fluid Tips:


SRI-HD Fluid Needle

SRIPRO-200-08-K
SRIPRO-200-10-K
SRIPRO-200-12-K
SRIPRO-200-14-K

SRIPRO-300-08-10-K
SRIPRO-300-08-10-K
SRIPRO-300-12-14-K
SRIPRO-300-12-14-K

Air Consumption Graph

(measured using SRI-HD gun with 1.4mm fluid Tip)

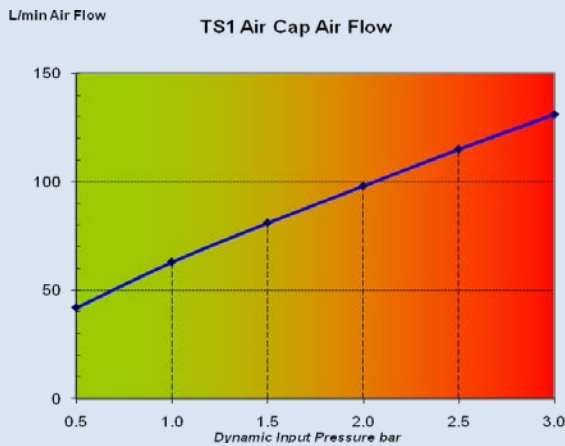

Spray Pattern



Pattern Shape:

Straight sides/Tapered Ends

Design Target Distance:
200mm (8")

Approximate Fan Size:

205mm long x 45mm wide @
100 ml/min using 20 sec Din 4
@ 200mm (8") Target
Distance

130mm long x 30mm wide @
100 ml/min using 20 sec Din 4
@ 100mm (4") Target
Distance

Typical Applications:

Wood, General Industrial, Metal, Lubricants,
Adhesive, Plastic, Aerospace, Leather, Military,
Decorative, Construction, Light Marine

Typical Fluid Flow Specification:

Small scale application Air Cap.

0-200 ml/min

Viscosity Range Sprayed:

15 to 30 sec Din 4

Material Supply: Gravity Feed

Original design specification:

Small components, repair & highlighting
2.0 to 3.0 bar nominal handle inlet pressure

Materials of Construction

Electroless Nickel Plated Brass Air Cap

Part Number: SRIPRO-100-TS1-K Air Cap and retaining ring

Notes:

F. Spray Pattern Faults and Troubleshooting



Split Spray Pattern
A C E H J



Split Spray Pattern
A C E H J



Burst Pattern
F K



Banana
L M



Centre Heavy
B D F I K



Centre Heavy
F G



One end heavy
L M

- | | |
|---|---|
| A. Horn Air Pressure too high | Decrease using control knob |
| B. Horn air Pressure too low | Increase using control knob or regulator Pressure |
| C. Air Input Pressure to gun too high | Decrease regulator Pressure |
| D. Air Input Pressure to gun too low | Increase |
| E. Fluid flow too low | Increase fluid flow – larger Tip or increase Pressure |
| F. Fluid flow too high | Decrease fluid flow – smaller Tip decrease Pressure |
| G. Fluid flow too high for Fluid Tip size used | Decrease fluid flow or increase Fluid Tip size |
| H. Fluid Viscosity too low for air Pressure used | Increase viscosity or decrease air Pressure |
| I. Fluid Viscosity too high | Decrease viscosity or increase air Pressure |
| J. Wrong Air Cap selected – lower fluid flow version required | Select alternative Air Cap |
| K. Wrong Air Cap Selected – Higher fluid flow version required | Select alternative Air Cap |
| L. Hole in Air Cap partially blocked or damaged | Clean or replace Air Cap |
| M. Fluid Tip hole or front face partially blocked or damaged | Clean or replace Fluid Tip |

Finishing Brands UK Ltd.

Ringwood Road
Bournemouth, BH11 9LH England
Tel: +44(0) 1202 571111
E-mail: marketing-uk@carlisleleft.eu

Finishing Brands Germany GmbH

Justus-von-Liebig-Str. 31
D - 63128 Dietzenbach
Tel: +49 (0) 60 74 403-1
Fax: +49 (0) 60 74 403-281
E-mail: marketing-de@carlisleleft.eu

Surfaces et Finitions

163-171 Av. des Auréats
F - 26014 Valence cedex FRANCE
Tel: +33 (0) 4 75 75 27 00
Fax: +33 (0) 4 75 75 27 59
E-mail: marketing-fr@carlisleleft.eu



www.finishingbrands.eu

Issue E14.2 Oct 14